


SP-60/4 - Mini Bass Speaker

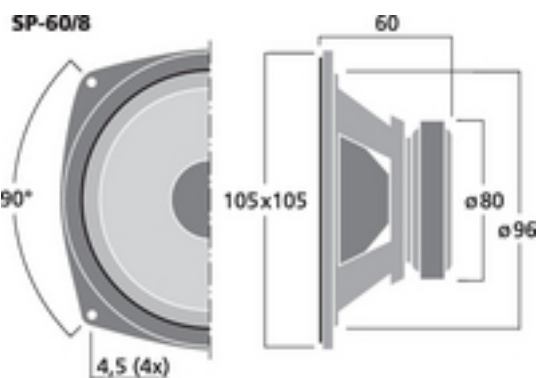

Hi-fi bass-midrange speakers, 30 W, 8 Ohm (/8) and 4 Ohm (/4)

- Drilled pole core
- Good frequency response linearity
- For small speaker systems in the hi-fi range

Technical data:

| | |
|---|------------------------------|
| Impedance (Z) | : 4 Ohm |
| Transmission technology | : - |
| Frequency range | : f3-8,000 Hz |
| Resonant frequency (fs) | : 65 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 30 W |
| Peak music power output (MAX) | : 60 W |
| SPL | : 90 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.8 mm/N |
| Moving mass (Mms) | : 4 g |
| Mech. Q factor (Qms) | : 2.10 |
| Electr. Q factor (Qes) | : 0.64 |
| Total Q factor (Qts) | : 0.49 |
| Equivalent volume (Vas) | : 6 l |
| DC resistance (Re) | : 3.3 Ohm |
| Force factor (BxL) | : 2.90 Tm |
| Voice coil induct. (Le) | : 0.2 mH |
| Voice coil diameter | : $\varnothing \sim 25.5$ mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : ± 2 mm |
| Eff. cone area (Sd) | : 55 cm ² |
| Magnet weight | : 280 g |
| Magnet diameter | : $\varnothing \sim 80$ mm |
| Mounting cutout | : $\varnothing \sim 96$ mm |
| Mounting depth | : 60 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : 105 x 105 x 60 mm |
| Outside diameter | : - |



| | |
|--------------------------------|--------------------------|
| Width | : 105 mm |
| Height | : 105 mm |
| Depth | : 60 mm |
| Colour | : black |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.654 kg |
| Packing unit | : 1 |
| Type of speaker | : 4" |
| Packing dimensions (W x H x L) | : 0.11 x 0.065 x 0.115 m |
| Gross weight | : 0.685 kg |
| Net weight | : 0.654 kg |
| Low-impedance | : 1 |