


## SP-13/4 - Universal Loudspeaker

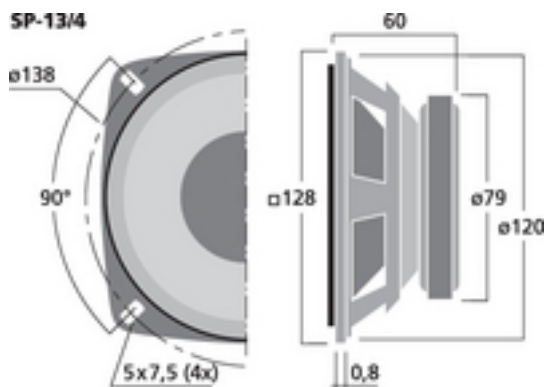

Universal speaker, 20 W, 4 Ohm

- For general applications up to the PA range
- Wide bandwidth radiation

Klang+Ton 02/2018

“Quite respectable. [...] considering the modest use of material, a remarkable performance.” (SP-13/4 and HT-22/8 in the Cheap Trick 296 of Klang+Ton)

## Technical data:

Impedance (Z)	: 4 Ohm
Transmission technology	: -
Frequency range	: f3-8,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 20 W
Peak music power output (MAX)	: 40 W
SPL	: 88 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\sim}$ 79 mm
Mounting cutout	: $\tilde{\sim}$ 120 mm
Mounting depth	: 59.2 mm
Mounting hole diameter	: $\tilde{\sim}$ 138 mm
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 128x128 mm
Outside diameter	: -

Width	: 128 mm
Height	: 128 mm
Depth	: 60 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 605 g
Packing unit	: 1
Type of speaker	: 5"
Packing dimensions (W x H x L)	: 0.13 x 0.06 x 0.13 m
Gross weight	: 0.65 kg
Net weight	: 0.605 kg
Low-impedance	: 1