
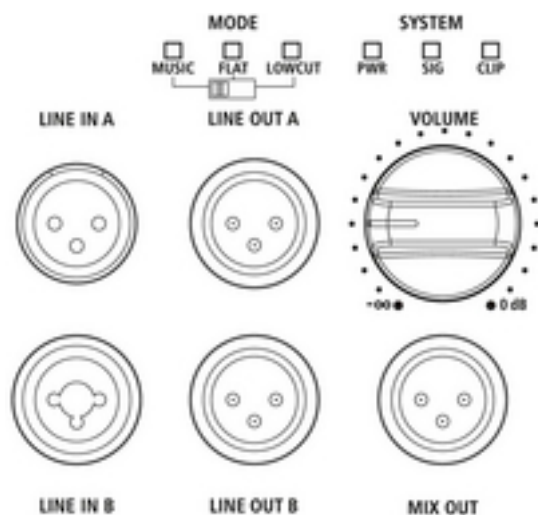


DRIVE-10A - PA DSP Loudspeaker

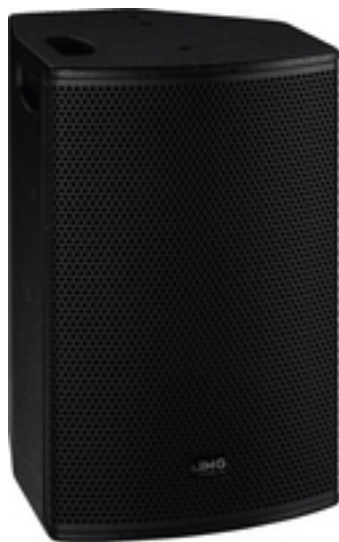

With the DRIVE series

you will get robust and easy-to-use PA speakers which are suitable for versatile applications and feature the latest DSP-controlled amplifier technology. There are 3 selectable presets available to provide a perfect sound adjustment for any kind of application. These robust and high-quality cabinets made of birch plywood are suitable for general use. The arrangement of the handles allow for easy manageability.

Professional active DSP speaker system with 2-channel amplifier, 200 W

- Compact 10/2 full range system with cabinet made of birch plywood

- DSP-controlled 2-channel amplifier (bass: class D, tweeter: class A/B)
- 3 selectable presets
- FLAT (linear adjustment)
- MUSIC (slightly raised bass and treble)
- LOW CUT (with high-pass filter for application with an additional subwoofer)
- 25 cm (10") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- Excellent sound characteristics
- High-quality coating and neat workmanship
- Multi-purpose positioning and installation options
- Horn tweeter with consistent radiation pattern
- M8 threaded inserts for suspended installation, stand sleeve
- Volume control
- 2 x balanced line in
- 2 x parallel line out
- 1 x balanced mix out
- Power and clip indicator

Technical data:

| | |
|--------------------------------|---|
| active | : 1 |
| DSP | : 1 |
| Active/passive | : active |
| Transmission technology | : cable |
| Total output power | : 400 W |
| Power rating (RMS) | : DSP-controlled 200 W (140 + 60) bass: 140 W treble: 60 W |
| Total power rating | : - |
| Power rating (RMS) | : - |
| Impedance | : - |
| Frequency range | : 55-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : 790 mV/40 kOhm (line, bal.) |
| System | : 10/2 full range |
| Full range speaker | : - |
| Bass speaker | : 25 cm (10") bass speaker |
| Midrange speaker | : - |
| Tweeter | : 25 mm (1") horn tweeter |
| Number of speakers | : 2 |
| Speaker size | : 25 cm (10") |
| SPL | : 98 dB/W/m |
| Max. rated SPL | : 123 dB |
| Radiation angle/beam angle | : H: 90°/V: 60°, horn can be turned |
| Radiation angle, horizontal | : 90° |
| Radiation angle, vertical | : 60° |
| Features | : - |
| Housing material | : birch plywood |
| Colour | : black |
| Mounting device | : M8 threaded inserts, stand sleeve |
| Protected against ball rebound | : - |
| Protection class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : ∿ 230Â V/50Â Hz/350Â VA |
| Dimensions | : 320 x 530 x 350 mm |
| Width | : 320 mm |

| | |
|--------------------------------|---|
| Height | : 530 mm |
| Depth | : 350 mm |
| Weight | : 12.18 kg |
| Inputs | : 1 x comb. XLR/6.3 mm: line 1 x XLR: line |
| Outputs | : 2 x XLR par. out 1 x XLR mix out |
| Replacement voice coil | : - |
| Other features | : DSP-controlled limiter 3 selectable presets |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.42 x 0.63 x 0.45 m |
| Gross weight | : 16.02 kg |
| Net weight | : 12.18 kg |