


ESP-50AB/WS - PA Wall Speaker

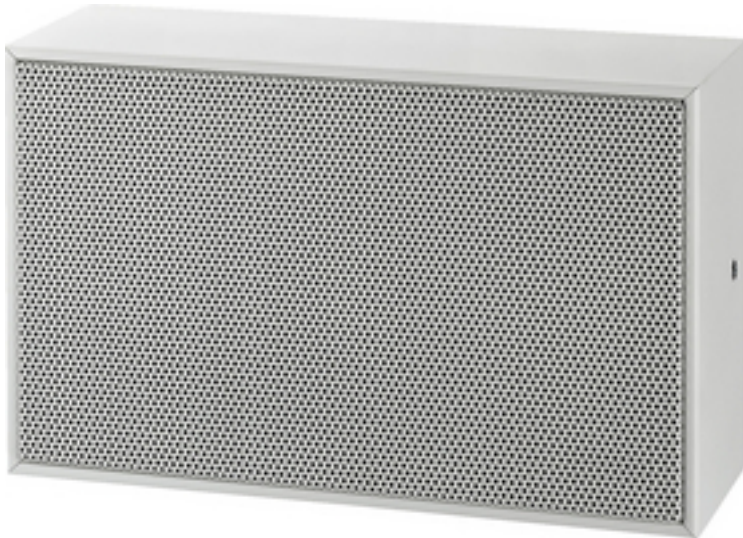

PA A/B wall speaker,
with EN 54-24 certification for voice evacuation systems with A/B speaker distribution according to EN 60849
and DIN VDE 0833-4.

- 100 V line technique
- 2 separate full range speakers (10 cm), each with its own transformer 6/3/1.5 W
- Connection via 2 spring-loaded terminals inside the cabinet
- Wooden cabinet with protective metal grille
- Easy wall mounting via supplied metal bracket and mounting accessories
- Ball-proof according to DIN 18032, Part 3

Technical data:

| | |
|--------------------------------|---------------------|
| 100 V | : 1 |
| EN 54 certification | : 1 |
| protected against ball rebound | : 1 |
| Active/passive | : passive |
| Transmission technology | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : 2 x 6/3/1.5 W |
| Impedance | : - |
| Frequency range | : 120-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 2 |
| Speaker size | : 10 cm |
| SPL | : 92 dB/W/m |
| Max. rated SPL | : 99 dB |
| Radiation angle/beam angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : - |
| Housing material | : wood |
| Colour | : white |
| Mounting device | : metal bracket |
| Protected against ball rebound | : yes |
| Protection class | : - |
| Admiss. ambient temp. | : -10 °C to +50 °C |
| Power supply | : - |
| Dimensions | : 265 x 165 x 90 mm |

| | |
|--------------------------------|-----------------------|
| Width | : 265 mm |
| Height | : 165 mm |
| Depth | : 90 mm |
| Weight | : 1.9 kg |
| Inputs | : - |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.18 x 0.27 x 0.1 m |
| Gross weight | : 2.12 kg |
| Net weight | : 1.9 kg |