


IT-350/EN - Horn Speaker

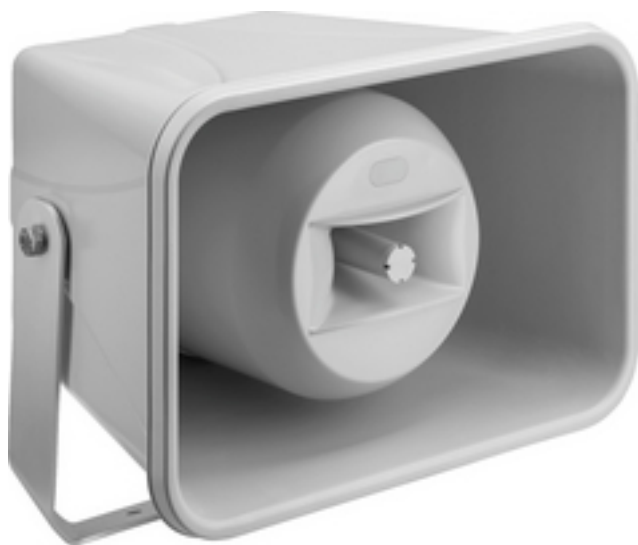

Weatherproof horn speaker (music horn), 2-way technology and EN 54-24 certification

- 100 V line technique with 4 power taps: 30/15/7.5/3.75 W
- Weatherproof and IP66 certified
- High-quality music reproduction
- 16 cm bass-midrange speaker and 25 mm (1") horn
- Robust light grey ABS plastic housing
- Supplied with mounting bracket and stainless steel screws

Technical data:

| | |
|--------------------------------|--------------------|
| Outdoors | : 1 |
| weatherproof | : 1 |
| 100 V | : 1 |
| EN 54 certification | : 1 |
| Active/passive | : passive |
| Transmission technology | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : 30 W |
| Power rating (RMS) | : 30/15/7.5/3.75 W |
| Impedance | : - |
| Frequency range | : 100-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : 16 cm (6") |
| Midrange speaker | : - |
| Tweeter | : 25 mm (1") |
| Number of speakers | : 2 |
| Speaker size | : 16 cm |
| SPL | : 101 dB/W/m |
| Max. rated SPL | : 116 dB |
| Radiation angle/beam angle | : H100°/V60° |
| Radiation angle, horizontal | : 100° |
| Radiation angle, vertical | : 60° |
| Features | : 2-way |
| Housing material | : ABS |
| Colour | : light grey |
| Mounting device | : mounting bracket |
| Protected against ball rebound | : - |
| Protection class | : IP66 |
| Admiss. ambient temp. | : -20 °C to +90 °C |
| Power supply | : - |

| | |
|--------------------------------|------------------------|
| Dimensions | : 370 x 250 x 330 mm |
| Width | : 370 mm |
| Height | : 250 mm |
| Depth | : 330 mm |
| Weight | : 4.5 kg |
| Inputs | : - |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : weatherproof, EN 54 |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.27 x 0.41 x 0.39 m |
| Gross weight | : 5.73 kg |
| Net weight | : 4.79 kg |