
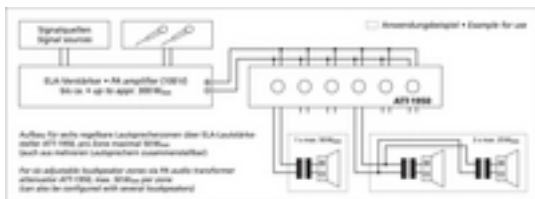


# ATT-1950 - 19" PA Attenuator

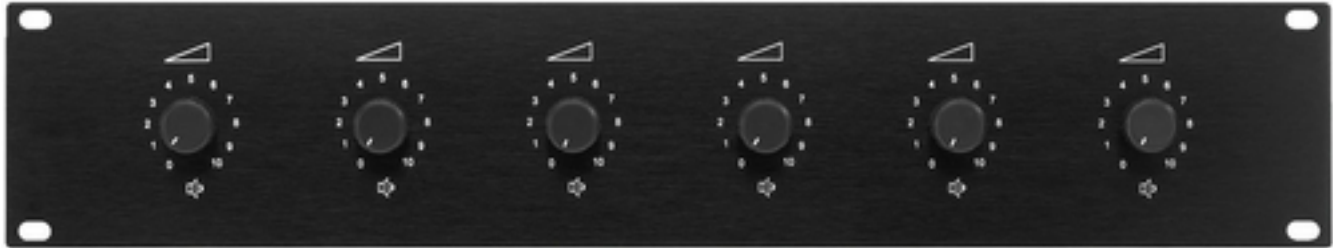

6-way PA volume control for 482 mm (19") rack installation

- 6 audio transformers for 100 V transmission technology
- Power rating: 6 x 50 W
- Connection for priority circuit, 6 priority relays ( DC 24 V/20 mA)
- Attenuation in 10 steps, position 0 is OFF
- Aluminium front panel
- Available in 3 power classes
- Plug-in screw terminal

## Technical data:

100 V	: 1
Description	: wall-mounted PA volume control
Frequency range	: 50-18,000 Hz
Power rating	: 6 x 50 W
Priority facility	: yes
Dimensions	: 484 x 88 x 77 mm, 2 RU
Mounting depth	: -
Weight	: 1.379 kg
Surface-mounted housing	: -