
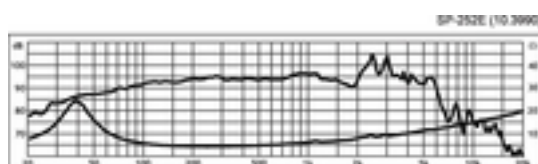


SP-252E - Woofer

150
W_{MAX}

10

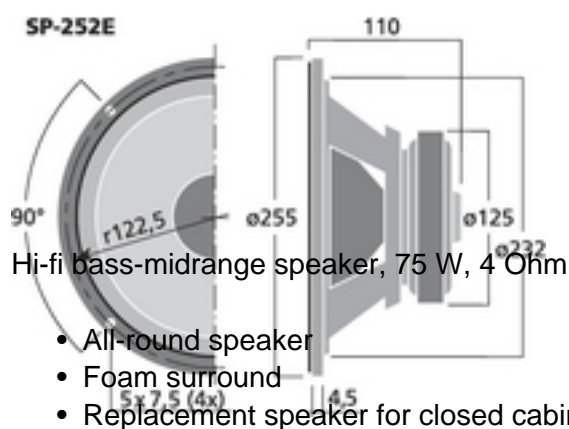

- All-round speaker
- Foam surround
- Replacement speaker for closed cabinets

Technical data:

| | |
|---|--------------------------------------|
| Impedance (Z) | : 4 Ohm |
| Transmission technology | : - |
| Frequency range | : f3-6,000 Hz |
| Resonant frequency (fs) | : 42 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 75 W |
| Peak music power output (MAX) | : 150 W |
| SPL | : 94 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.33 mm/N |
| Moving mass (Mms) | : 43 g |
| Mech. Q factor (Qms) | : 3.13 |
| Electr. Q factor (Qes) | : 0.60 |
| Total Q factor (Qts) | : 0.50 |
| Equivalent volume (Vas) | : 57 l |
| DC resistance (Re) | : 3.75 Ohm |
| Force factor (BxL) | : 8.50 Tm |
| Voice coil induct. (Le) | : 1.1 mH |
| Voice coil diameter | : $\tilde{\text{A}}$ 35.5 mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : \pm 4 mm |
| Eff. cone area (Sd) | : 353 cm ² |
| Magnet weight | : 960 g |
| Magnet diameter | : $\tilde{\text{A}}$ 125 mm |
| Mounting cutout | : $\tilde{\text{A}}$ 232 mm |
| Mounting depth | : 110 mm |
| Mounting hole diameter | : $\tilde{\text{A}}$ 245 mm |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\tilde{\text{A}}$ 255 mm x 110 mm |
| Outside diameter | : $\tilde{\text{A}}$ 255 mm |

| | |
|--------------------------------|------------------------|
| Width | : 255 mm |
| Height | : - |
| Depth | : 110 mm |
| Colour | : black |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 2.3 kg |
| Packing unit | : 1 |
| Type of speaker | : 10" |
| Packing dimensions (W x H x L) | : 0.26 x 0.12 x 0.26 m |
| Gross weight | : 2.42 kg |
| Net weight | : 2.295 kg |
| Low-impedance | : 1 |