

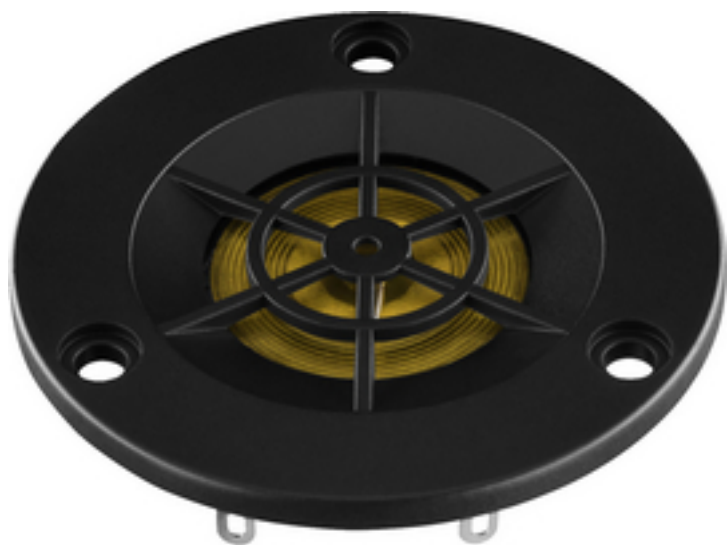


RBT-56 - HiFi Ribbon Tweeter

20
W_{RMS}

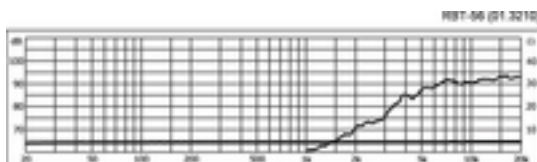

RBT-56

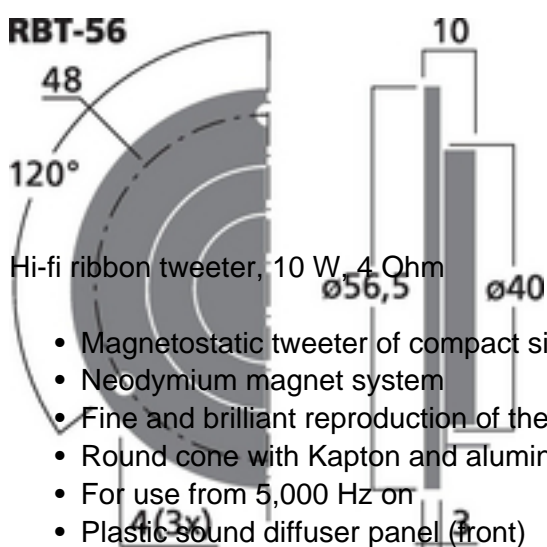

- Magnetostatic tweeter of compact size
- Neodymium magnet system
- Fine and brilliant reproduction of the high frequencies
- Round cone with Kapton and aluminium film
- For use from 5,000 Hz on
- Plastic sound diffuser panel (front)

Technical data:

Impedance (Z)	: 4 Ohm
Transmission technology	: -
Frequency range	: 5,000-40,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 5,000 Hz
Power rating (RMS)	: 10 W
Peak music power output (MAX)	: 20 W
SPL	: 90 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: 3.5 Ohm
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: magnetostatic speaker
Mounting cutout	: Å~ 40 mm
Mounting depth	: 10 mm
Mounting hole diameter	: Å~ 48 mm
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 56.5 mm
Outside diameter	: Å~ 56.5 mm

Width	: Å~ 56.5 mm
Height	: -
Depth	: 10 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.035 kg
Packing unit	: 1
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.065 x 0.015 x 0.075 m
Gross weight	: 0.045 kg
Net weight	: 0.035 kg
Low-impedance	: 1