


EPS32 - Forstærker 2x15W DIN

new

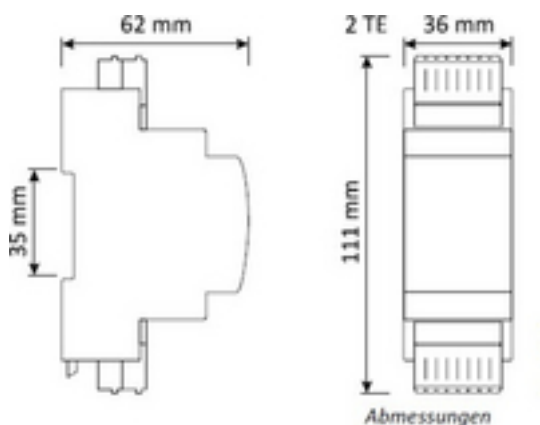

Amplifier, 2 x 15 W

- For mounting onto DIN rails according to DIN EN 60529, 2 HP
- 2-channel class D amplifier
- Selectable mode stereo/bridged
- Inputs to be switched externally
- Input balanced and unbalanced
- Summing amplifier input
- Microphone input
- Separate volume control for each channel

- High-efficiency green design

Technical data:

| | |
|--|--|
| Peak output power | : 30 W |
| Power rating | : - |
| Power rating at 2 Ohm | : - |
| Power rating at 4 Ohm | : 2 x 12 W |
| Power rating at 8 Ohm | : 2 x 6 W |
| Power rating at 16 Ohm | : - |
| Power rating at 100 V | : - |
| Power rating with 4 Ohm bridged operation | : 1 x 24 W |
| Power rating with 8 Ohm bridged operation | : 1 x 12 W |
| Output impedance | : 4-8 Ohm |
| Channels | : 2 |
| Zones | : - |
| Inputs | : 1 V/47 kOhm (bal.), 22 kOhm (unbal.) |
| Attenuation factor | : - |
| Frequency range | : 42-21,000 Hz |
| Crossover network | : - |
| Crossover frequency | : - |
| Integrated limiter | : - |
| Equalizer bass | : - |
| Equalizer midrange | : - |
| Equalizer treble | : - |
| S/N ratio | : 92 dB |
| Crosstalk attenuation | : - |
| THD | : 0.05% |
| Phantom power | : 9-12 V |
| Mains voltage | : - |
| Mains frequency | : - |
| Power consumption, operation | : - |
| Power consumption, standby | : - |
| Standby current | : - |
| Operating voltage (possible alternative) | : DC 12-26 V, rec. DC 24 V |
| Power supply (possible alternative) | : - |
| Admiss. ambient temp. | : -20 °C to +40 °C |
| Width | : 36 mm |
| Height | : 101 mm |

| | |
|--------------------------------|---------------------------|
| Depth | : 62 mm |
| Rack units, RU | : - |
| Weight | : 98 g |
| Connections | : spring-loaded terminals |
| Packing dimensions (W x H x L) | : 0.037 x 0.095 x 0.075 m |
| Gross weight | : 0.1297 kg |
| Net weight | : 0.098 kg |