
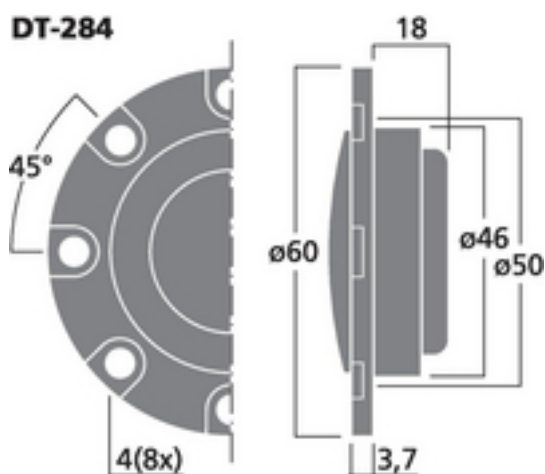


## DT-284 - Tweeter Pair

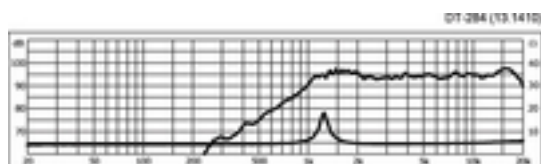

The Tweeter for Perfect Car Hi-fi Applications:

DT-284 "The Dome". This tweeter provides everything expected from a top class tweeter: a sensationally linear frequency response, high level reserves, low crossover frequency, compact size and a distinct and appealing design!

Pair of dome tweeters, 60 W, 4 Ohm

- 28 mm silk cone
- Aluminium voice coil
- Neodymium magnet



- High-quality ABS housing with 8-hole screw connection
- Perfect sound of extra low distortion
- Highest level stability
- Exceptionally long excursion

A crossover network is required for operation! Ideal: CDN-2X

## Technical data:

Impedance (Z)	: 4 Ohm
Transmission technology	: -
Frequency range	: fx-20,000 Hz
Resonant frequency (fs)	: 1,300 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 2,000 Hz
Power rating (RMS)	: 60 W
Peak music power output (MAX)	: 100 W
SPL	: 91 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: $\tilde{\text{A}} \sim 28 \text{ mm}$
Voice coil former	: -
Linear excursion ( $X_{\text{MAX}}$ )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\text{A}} \sim 46 \text{ mm}$
Mounting cutout	: $\tilde{\text{A}} \sim 50 \text{ mm}$
Mounting depth	: 18 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\text{A}} \sim 60 \text{ mm}$
Outside diameter	: $\tilde{\text{A}} \sim 60 \text{ mm}$

Width	: ~ 60 mm
Height	: -
Depth	: 21.7 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.18 kg
Packing unit	: 2
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.085 x 0.045 x 0.155 m
Gross weight	: 0.225 kg
Net weight	: 0.18 kg