


DT-101SK - HiFi Dome Tweeter


**FERRO
FLUID**

**50
W_{RMS}**

**25
mm**

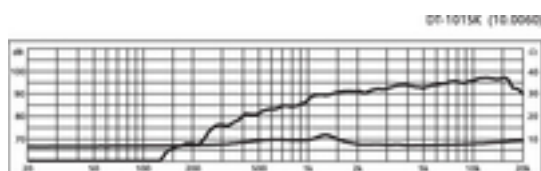

DT-101SK

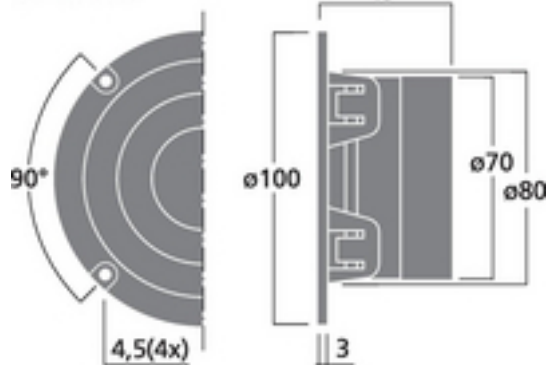

Hi-fi dome tweeter, 30 W, 8 Ohm

- Silk dome with optimum damping
- Attached, damped volume
- High linearity up to the brilliance frequency range
- Very good efficiency
- High-resolution sound
- For hi-fi applications of high requirements

Technical data:

Impedance (Z)	: 8 Ohm
Transmission technology	: -
Frequency range	: fx-22,000 Hz
Resonant frequency (fs)	: 900 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 2,000 Hz
Power rating (RMS)	: 30 W
Peak music power output (MAX)	: 50 W
SPL	: 92 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: $\tilde{\sim}$ 25.4 mm
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\sim}$ 70 mm
Mounting cutout	: $\tilde{\sim}$ 80 mm
Mounting depth	: 45 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\sim}$ 100 x 45 mm
Outside diameter	: $\tilde{\sim}$ 100 mm



Width	: Å~ 100 mm
Height	: -
Depth	: 45 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.46 kg
Packing unit	: 1
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.105 x 0.065 x 0.105 m
Gross weight	: 0.505 kg
Net weight	: 0.46 kg
Low-impedance	: 1