


## PA-2240 - PA Amplifier

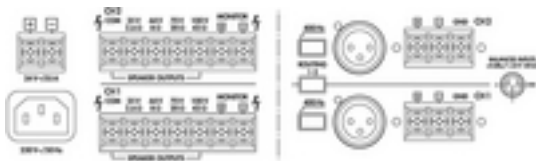

### PA power amplifier

- 2 x 240 W
- Routing switch for parallel operation on both channels
- Switchable 400 Hz high-pass filter 6 dB/oct.
- Soft start
- Temperature-controlled fan
- LED indication for clip, protect, overtemperature and output level
- Mains operation or 24 V emergency power operation

## Technical data:

100 V	: 1
Low-impedance	: 1
Peak output power	: -
Power rating	: 480 W
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: -
Power rating at 8 Ohm	: 2 x 240 W
Power rating at 16 Ohm	: -
Power rating at 100 V	: 2 x 240 W
Power rating with 4 Ohm bridged operation	: -
Power rating with 8 Ohm bridged operation	: -
Output impedance	: 25Â V/2.6Â Ohm, 44Â V/8Â Ohm, 70Â V/20Â Ohm, 100Â V/42Â Ohm
Channels	: 2
Zones	: -
Inputs	: 1.2Â V, bal.
Attenuation factor	: -
Frequency range	: 35-20,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: -
Equalizer midrange	: -
Equalizer treble	: -
S/N ratio	: ? 100 dB(A)
Crosstalk attenuation	: -
THD	: < 1%
Phantom power	:
Mains voltage	: ~ 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 1,300 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: DC 24 V
Power supply (possible alternative)	: DC 55 A

Admiss. ambient temp.

: 0-40 °C





Width	: 483 mm
Height	: 88 mm
Depth	: 374 mm
Rack units, RU	: 2
Weight	: 18 kg
Connections	: 2 x XLR / screw contacts (inputs) screw contacts (speakers)
Packing dimensions (W x H x L)	: 0.48 x 0.18 x 0.54 m
Gross weight	: 20.14 kg
Net weight	: 18.12 kg