


## EPS30/100V-MI - Amplifier 1 x 30 Watt/100 V

**new**

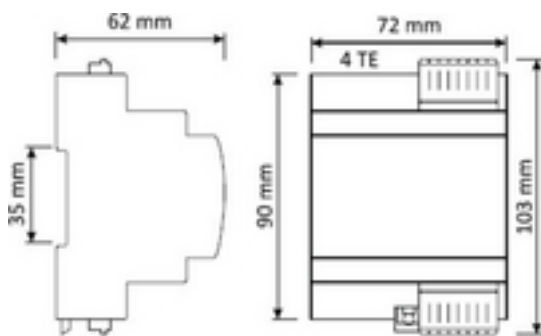

Abmessungen

### 100 V PA amplifier

- For mounting onto DIN rails according to DIN EN 60715, 4 HP
- 1-channel class D amplifier
- 100 V PA transformer
- Input balanced and unbalanced
- Microphone input
- High-efficiency green design
- Extra lightweight and compact version

## Technical data:

Peak output power	: 25 W
Power rating	: -
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: -
Power rating at 8 Ohm	: -
Power rating at 16 Ohm	: -
Power rating at 100 V	: 10 W
Power rating with 4 Ohm	: -
bridged operation	
Power rating with 8 Ohm	: -
bridged operation	
Output impedance	: -
Channels	: 1
Zones	: -
Inputs	: 1 V/47 kOhm (bal.), 22 kOhm (unbal.)
Attenuation factor	: -
Frequency range	: 42-18,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: -
Equalizer midrange	: -
Equalizer treble	: -
S/N ratio	: 97 dB
Crosstalk attenuation	: -
THD	: < 0.1%
Phantom power	: 9-12 V
Mains voltage	: -
Mains frequency	: -
Power consumption, operation	: -
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: DC 12-26 V, rec. DC 24 V
Power supply (possible alternative)	: -
Admiss. ambient temp.	: -20 °C to +40 °C
Width	: 72 mm
Height	: 103 mm

Depth	: 62 mm
Rack units, RU	: -
Weight	: 300 g
Connections	: spring-loaded terminals
Packing dimensions (W x H x L)	: 0.072 x 0.095 x 0.075 m
Gross weight	: 0.3284 kg
Net weight	: 0.3 kg