
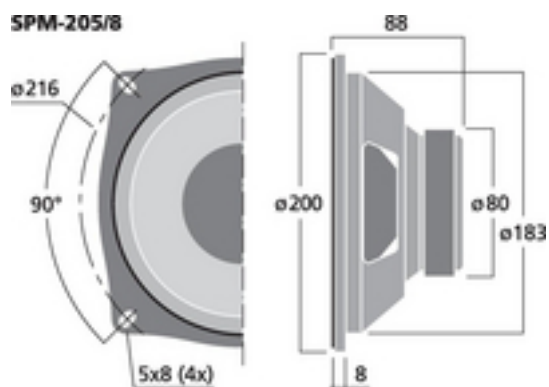


SPM-205/8 - HiFi Woofer

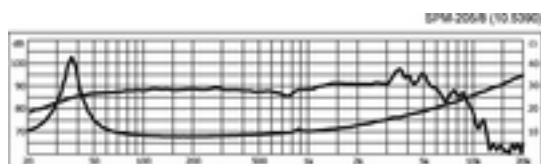

Hi-fi bass-midrange speakers, 70 W, 8 Ohm (/8) and 4 Ohm (/4)

- Excellent replacement speakers of the same quality as from the original equipment manufacturer
- Coated low-resonance paper cone
- Long-term stable rubber surround
- To be used preferably in closed or transmission line cabinets

Technical data:

| | |
|---|------------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission technology | : - |
| Frequency range | : f3-5,000 Hz |
| Resonant frequency (fs) | : 37 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 70 W |
| Peak music power output (MAX) | : 150 W |
| SPL | : 89 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.75 mm/N |
| Moving mass (Mms) | : 22 g |
| Mech. Q factor (Qms) | : 2.95 |
| Electr. Q factor (Qes) | : 0.92 |
| Total Q factor (Qts) | : 0.7 |
| Equivalent volume (Vas) | : 54 l |
| DC resistance (Re) | : 7.2 Ohm |
| Force factor (BxL) | : 6.50 Tm |
| Voice coil induct. (Le) | : 0.7 mH |
| Voice coil diameter | : \tilde{A} 25.5 mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : \pm 3 mm |
| Eff. cone area (Sd) | : 210 cm ² |
| Magnet weight | : 380 g |
| Magnet diameter | : \tilde{A} 80 mm |
| Mounting cutout | : \tilde{A} 183 mm |
| Mounting depth | : 80 mm |
| Mounting hole diameter | : \tilde{A} 216 mm |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : \tilde{A} 200 mm x 88 mm |
| Outside diameter | : \tilde{A} 200 mm |

| | |
|--------------------------------|---------------------------|
| Width | : Å~ 200 mm |
| Height | : - |
| Depth | : 88 mm |
| Colour | : black |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 1.4 kg |
| Packing unit | : 1 |
| Type of speaker | : 8" |
| Packing dimensions (W x H x L) | : 0.215 x 0.125 x 0.215 m |
| Gross weight | : 1.5 kg |
| Net weight | : 1.4 kg |
| Low-impedance | : 1 |