
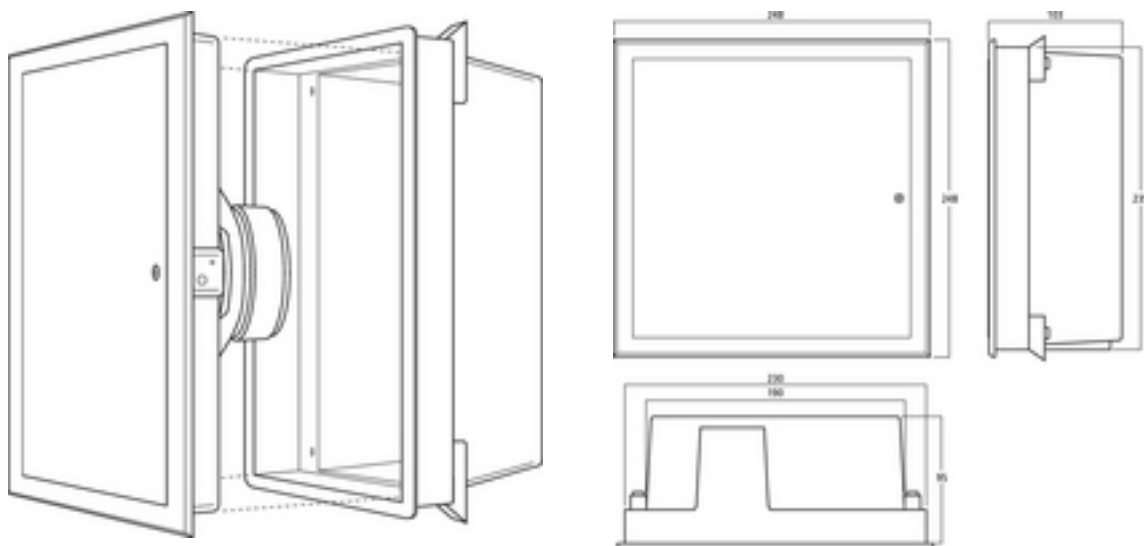


## SPE-8U - Loudspeaker

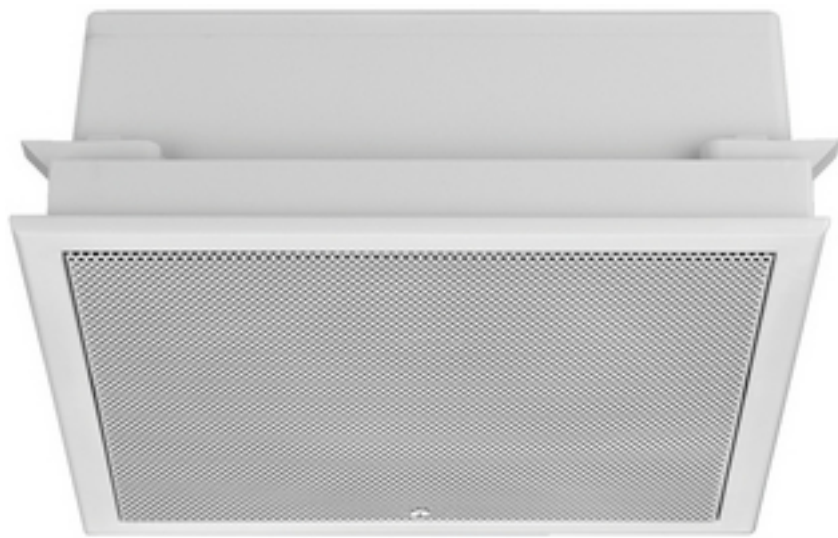

### Hi-Fi væg- og loftshøjttalere til indbygning, 8 Ohm

- 2-vejs coaxialt højttalersystem i høj kvalitet med rigtig gode lydegenskaber
- 20 cm (8") basenhed med glasfibrermembran, 24 mm (1") dome tweeter med titaniummembran
- Plastikskinne til indbygning i vægge eller solide lofter
- Krævet hulstørrelse: ca. 242 x 242 x 100 mm
- Frontgitter i metal med plastikramme

## Technical data:

Impedance (Z)	: 8 Ohm
Transmission technology	: -
Frequency range	: 70-20,000 Hz
Resonant frequency (fs)	: 60 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 30 W
Peak music power output (MAX)	: 60 W
SPL	: 89 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: 242 x 242 mm
Mounting depth	: 100 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 248 x 248 x 100 mm
Outside diameter	: -

Width	: 248 mm
Height	: 248 mm
Depth	: 100 mm
Colour	: white
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 1.6 kg
Packing unit	: 1
Type of speaker	: 200
Packing dimensions (W x H x L)	: 0.255 x 0.12 x 0.255 m
Gross weight	: 1.78 kg
Net weight	: 1.62 kg
Low-impedance	: 1