


## MPT-177 - Piezo Twin Driver

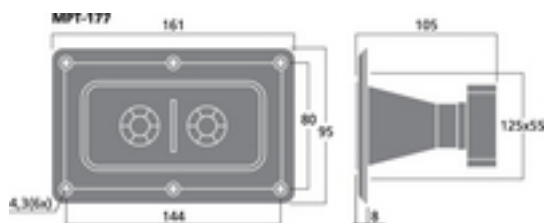

### Piezo tweeter

- Very high sound pressure level
- Consistent frequency response

## Technical data:

Impedance (Z)	: ? 1,000 Ohm
Transmission technology	: -
Frequency range	: 3,500-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: -
Peak music power output (MAX)	: 115 W (8 Ohm system) 225 W (4 Ohm sSystem)
SPL	: 99 dB/W/m
Max. rated SPL	: -
Max. voltage	: ~ 30 V
Radiation angle	: V: 60°/H: 30°
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: 125 x 55 mm
Mounting depth	: 97 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 161 x 95 x 105 mm
Outside diameter	: -

Width	: 161 mm
Height	: 95 mm
Depth	: 105 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.14 kg
Packing unit	: 1
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.1 x 0.105 x 0.165 m
Gross weight	: 0.151 kg
Net weight	: 0.145 kg
Low-impedance	: 1