


## ESP-50AB/WS - PA Wall Speaker

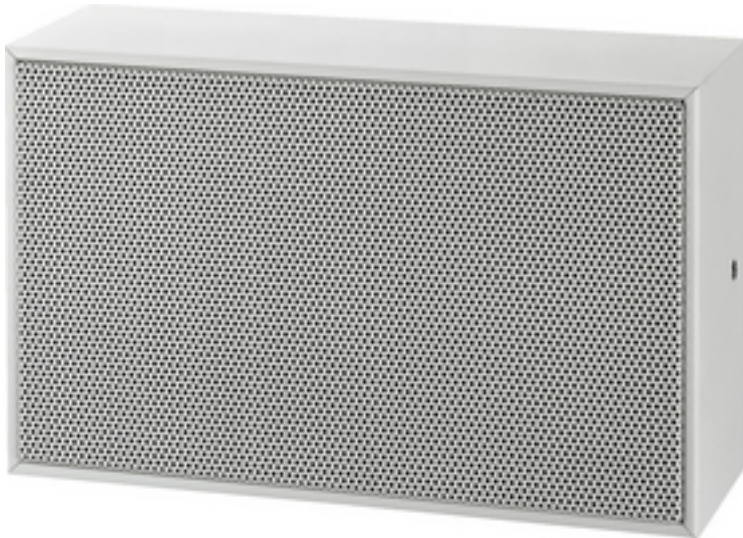

PA A/B wall speaker,  
with EN 54-24 certification for voice evacuation systems with A/B speaker distribution according to EN 60849  
and DIN VDE 0833-4.

- 100 V line technique
- 2 separate full range speakers (10 cm), each with its own transformer 6/3/1.5 W
- Connection via 2 spring-loaded terminals inside the cabinet
- Wooden cabinet with protective metal grille
- Easy wall mounting via supplied metal bracket and mounting accessories
- Ball-proof according to DIN 18032, Part 3

## Technical data:

100 V	: 1
EN 54 certification	: 1
protected against ball rebound	: 1
Active/passive	: passive
Transmission technology	: 100 V
Total output power	: -
Power rating (RMS)	: -
Total power rating	: -
Power rating (RMS)	: 2 x 6/3/1.5 W
Impedance	: -
Frequency range	: 120-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: -
Full range speaker	: -
Bass speaker	: -
Midrange speaker	: -
Tweeter	: -
Number of speakers	: 2
Speaker size	: 10 cm
SPL	: 92 dB/W/m
Max. rated SPL	: 99 dB
Radiation angle/beam angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Features	: -
Housing material	: wood
Colour	: white
Mounting device	: metal bracket
Protected against ball rebound	: yes
Protection class	: -
Admiss. ambient temp.	: -10 °C to +50 °C
Power supply	: -
Dimensions	: 265 x 165 x 90 mm

Width	: 265 mm
Height	: 165 mm
Depth	: 90 mm
Weight	: 1.9 kg
Inputs	: -
Outputs	: -
Replacement voice coil	: -
Other features	: -
Accessories	: -
Packing dimensions (W x H x L)	: 0.18 x 0.27 x 0.1 m
Gross weight	: 2.12 kg
Net weight	: 1.9 kg