
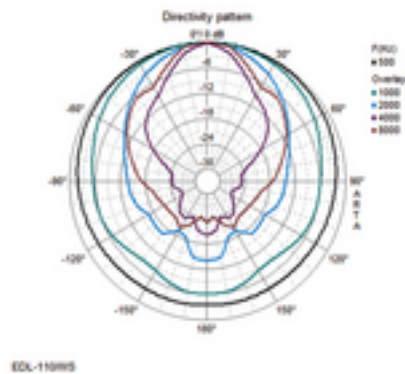


# EDL-110/WS - PA Loudspeaker

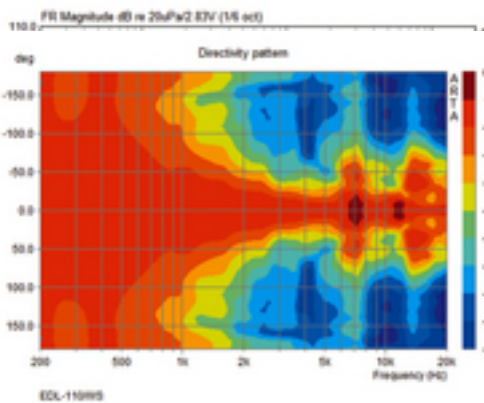

## Weatherproof PA sound projector

- 100 V transmission technology
- 1 speaker with polypropylene cone
- Splashproof due to plastic housing with rubber seals and high-strength cable gland
- Connection cable with 3 power taps
- Stainless steel screws and pivoting mounting bracket

## Technical data:

Outdoors	: 1
weatherproof	: 1
100 V	: 1
Active/passive	: passive
Transmission technology	: 100 V
Total output power	: -
Power rating (RMS)	: -
Total power rating	: -
Power rating (RMS)	: 10/5/2.5 W
Impedance	: -
Frequency range	: 120-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: -
Full range speaker	: -
Bass speaker	: -
Midrange speaker	: -
Tweeter	: -
Number of speakers	: 1
Speaker size	: -
SPL	: 94 dB/W/m
Max. rated SPL	: -
Radiation angle/beam angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Features	: -
Housing material	: plastic
Colour	: white
Mounting device	: mounting bracket
Protected against ball rebound	: -
Protection class	: IP44
Admiss. ambient temp.	: -30 °C to +40 °C
Power supply	: -
Dimensions	: 180 mm x 270 mm

Width	: Å~ 180 mm
Height	: -
Depth	: 270 mm
Weight	: 2 kg
Inputs	: connection cable with 3 power taps
Outputs	: -
Replacement voice coil	: -
Other features	: -
Accessories	: -
Packing dimensions (W x H x L)	: 0.24 x 0.305 x 0.275 m
Gross weight	: 2.5 kg
Net weight	: 2.08 kg