



EDL-420/WS - PA Loudspeaker

100V

8Ω



IP44

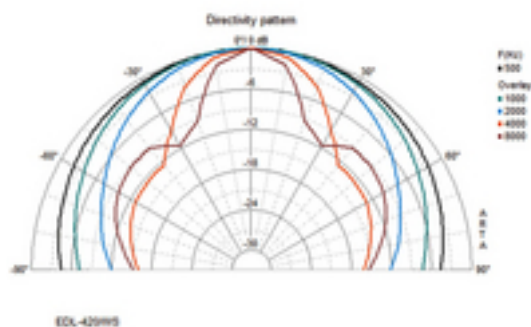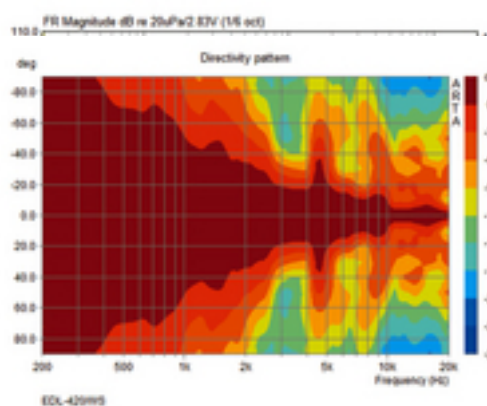

Weatherproof PA ball speaker

- 100 V transmission technology or 8 Ohm operation
- White ABS housing (self-extinguishing, complies with standard UL 94V-0)
- Supplied with 480 cm connection cable and canopy

Technical data:

| | |
|--------------------------------|---------------------|
| Outdoors | : 1 |
| weatherproof | : 1 |
| 100 V | : 1 |
| Low-impedance | : 1 |
| Active/passive | : passive |
| Transmission technology | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : 20/10/5 W |
| Impedance | : 8 Ohm |
| Frequency range | : 120-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : 160 mm (6") |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 1 |
| Speaker size | : - |
| SPL | : 94 dB/W/m |
| Max. rated SPL | : - |
| Radiation angle/beam angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : - |
| Housing material | : ABS, UL 94 V-0 |
| Colour | : white |
| Mounting device | : cable with canopy |
| Protected against ball rebound | : - |
| Protection class | : - |
| Admiss. ambient temp. | : -30 °C to +40 °C |
| Power supply | : - |



| | |
|--------------------------------|-------------------------|
| Dimensions | : 265 mm |
| Width | : 265 mm |
| Height | : - |
| Depth | : - |
| Weight | : 2.3 kg |
| Inputs | : - |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.305 x 0.28 x 0.38 m |
| Gross weight | : 2.84 kg |
| Net weight | : 2.34 kg |