


## EDL-620EN - PA Ceiling Speaker

**100V**

**EN  
54**

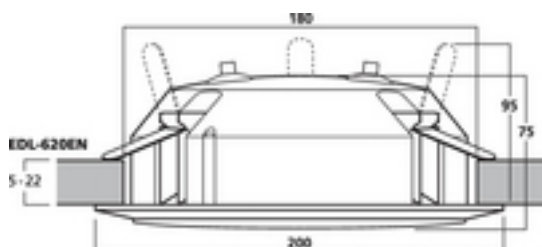

PA ceiling speaker,  
with EN 54-24 certification.

- 100 V transmission technology with 3 power taps 20/10/5 W
- Type 165 full range speaker with optimised voice reproduction
- Plastic cover with low mounting depth
- For a ceiling thickness from 5 to 22 mm
- Quick installation
- Robust metal basket and protective grille

## Technical data:

|   |                                |
|---|--------------------------------|
| Impedance (Z)                             | : -                            |
| Transmission technology                   | : 100 V                        |
| Frequency range                           | : 120-15,000 Hz                |
| Resonant frequency (fs)                   | : -                            |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                            |
| Power rating (RMS)                        | : 20/10/5 W                    |
| Peak music power output (MAX)             | : -                            |
| SPL                                       | : 93 dB/W/m                    |
| Max. rated SPL                            | : -                            |
| Max. voltage                              | : -                            |
| Radiation angle                           | : -                            |
| Radiation angle, horizontal               | : -                            |
| Radiation angle, vertical                 | : -                            |
| Suspension compl. (Cms)                   | : -                            |
| Moving mass (Mms)                         | : -                            |
| Mech. Q factor (Qms)                      | : -                            |
| Electr. Q factor (Qes)                    | : -                            |
| Total Q factor (Qts)                      | : -                            |
| Equivalent volume (Vas)                   | : -                            |
| DC resistance (Re)                        | : -                            |
| Force factor (BxL)                        | : -                            |
| Voice coil induct. (Le)                   | : -                            |
| Voice coil diameter                       | : -                            |
| Voice coil former                         | : -                            |
| Linear excursion (X <sub>MAX</sub> )      | : -                            |
| Eff. cone area (Sd)                       | : -                            |
| Magnet weight                             | : -                            |
| Magnet diameter                           | : -                            |
| Mounting cutout                           | : $\varnothing$ 180 mm         |
| Mounting depth                            | : 60 mm                        |
| Mounting hole diameter                    | : -                            |
| Hole spacing X-axis                       | : -                            |
| Hole spacing Y-axis                       | : -                            |
| Dimensions                                | : $\varnothing$ 200 mm x 70 mm |
| Outside diameter                          | : $\varnothing$ 200 mm         |

|                                |                         |
|--------------------------------|-------------------------|
| Width                          | : Å~ 200 mm             |
| Height                         | : -                     |
| Depth                          | : 70 mm                 |
| Colour                         | : white                 |
| Protective class               | : -                     |
| Admiss. ambient temp.          | : 0-40 °C               |
| Weight                         | : 1.1 kg                |
| Packing unit                   | : 1                     |
| Type of speaker                | : 165                   |
| Packing dimensions (W x H x L) | : 0.245 x 0.1 x 0.245 m |
| Gross weight                   | : 1.346 kg              |
| Net weight                     | : 1.104 kg              |
| 100 V                          | : 1                     |
| EN 54 certification            | : 1                     |