


# EDL-25 - PA Loudspeaker

**100V**

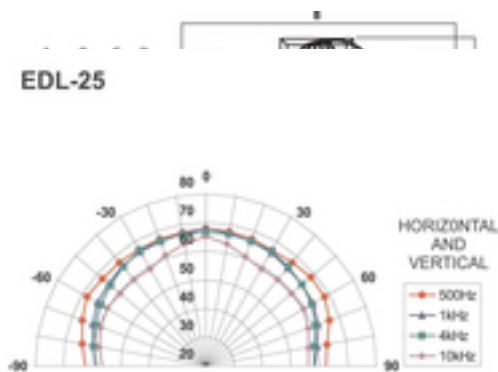

## PA loftshøjttaler

- 100 V line-teknologi via audiotransformer med tapsætning
- Full range højttaler med dual membran
- Plastikkabinat med frontgitter i metal
- Udført i ABS-plast, som er selvslukkende i overensstemmelse med UL-94V-0
- Til lofter med en tykkelse fra 10 til 40 mm

## Technical data:

|   |                     |
|---|---------------------|
| Impedance (Z)                             | : -                 |
| Transmission technology                   | : 100 V             |
| Frequency range                           | : 100-14,000 Hz     |
| Resonant frequency (fs)                   | : -                 |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                 |
| Power rating (RMS)                        | : 6/3/1.5 W         |
| Peak music power output (MAX)             | : -                 |
| SPL                                       | : 87 dB/W/m         |
| Max. rated SPL                            | : 94 dB             |
| Max. voltage                              | : -                 |
| Radiation angle                           | : -                 |
| Radiation angle, horizontal               | : -                 |
| Radiation angle, vertical                 | : -                 |
| Suspension compl. (Cms)                   | : -                 |
| Moving mass (Mms)                         | : -                 |
| Mech. Q factor (Qms)                      | : -                 |
| Electr. Q factor (Qes)                    | : -                 |
| Total Q factor (Qts)                      | : -                 |
| Equivalent volume (Vas)                   | : -                 |
| DC resistance (Re)                        | : -                 |
| Force factor (BxL)                        | : -                 |
| Voice coil induct. (Le)                   | : -                 |
| Voice coil diameter                       | : -                 |
| Voice coil former                         | : -                 |
| Linear excursion (X <sub>MAX</sub> )      | : -                 |
| Eff. cone area (Sd)                       | : -                 |
| Magnet weight                             | : -                 |
| Magnet diameter                           | : -                 |
| Mounting cutout                           | : Å~ 165 mm         |
| Mounting depth                            | : 60 mm             |
| Mounting hole diameter                    | : -                 |
| Hole spacing X-axis                       | : -                 |
| Hole spacing Y-axis                       | : -                 |
| Dimensions                                | : Å~ 205 mm x 70 mm |
| Outside diameter                          | : Å~ 205 mm         |

|                                |                          |
|--------------------------------|--------------------------|
| Width                          | : Å~ 205 mm              |
| Height                         | : -                      |
| Depth                          | : 70 mm                  |
| Colour                         | : white                  |
| Protective class               | : -                      |
| Admiss. ambient temp.          | : 0-40 °C                |
| Weight                         | : 0.724 kg               |
| Packing unit                   | : 1                      |
| Type of speaker                | : 130                    |
| Packing dimensions (W x H x L) | : 0.205 x 0.07 x 0.205 m |
| Gross weight                   | : 0.832 kg               |
| Net weight                     | : 0.724 kg               |
| 100 V                          | : 1                      |