


EDL-156 - PA Loudspeaker

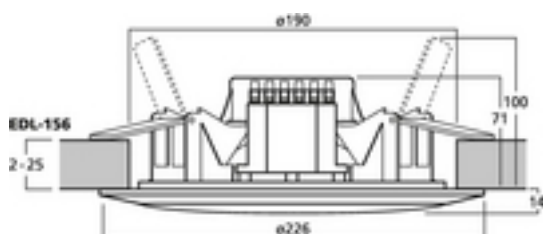

Vejrbestandige PA loftshøjtalere, varmebestandige op til 100°C. Til anvendelse i sauna og poolområder.

- 100 V line-teknologi
- 2-vejs system med dome tweeter
- Fremragende lyd
- Hvidt plastikkabinet
- Vejrbestandig højtalermembran
- Testet i overensstemmelse med ASTM B117 (400 timers saltsprøjtetest)
- Til lofter med en tykkelse fra 2 til 25 mm

Technical data:

| | |
|---|------------------------|
| Impedance (Z) | : - |
| Transmission technology | : 100 V |
| Frequency range | : 60-20,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 15/10/5/2.5/1.25 W |
| Peak music power output (MAX) | : - |
| SPL | : 88 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : - |
| Mounting cutout | : Å~ 190 mm |
| Mounting depth | : 75 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : Å~ 226Å mm x 100Å mm |
| Outside diameter | : Å~ 226 mm |

| | |
|--------------------------------|-------------------------|
| Width | : Å~ 226 mm |
| Height | : - |
| Depth | : 100 mm |
| Colour | : white |
| Protective class | : IP65 |
| Admiss. ambient temp. | : -30 °C to +100 °C |
| Weight | : 1.1 kg |
| Packing unit | : 1 |
| Type of speaker | : 180 |
| Packing dimensions (W x H x L) | : 0.23 x 0.095 x 0.23 m |
| Gross weight | : 1.249 kg |
| Net weight | : 1.083 kg |
| Outdoors | : 1 |
| weatherproof | : 1 |
| 100 V | : 1 |