


# PA-4040MPX - Pre-Amplifier

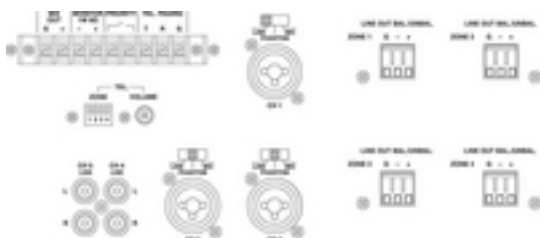

**4-zoners mixer**, til generel "multi-room" anvendelse.


- 4 zoner med routing-funktion for alle indgange
- 3 mikrofon-/line-indgange
- 2 stereo indgange, phono
- Alle indgange har gain, 2-vejs tonekontrol og zonevælger
- Mikrofonindgange med +15 V phantom strømforsyning
- Prioritet for kanal 1
- Separat paging-indgang, som kan routes til alle zoner
- 4 zone-udgange, som kan justeres individuelt
- Tilslutning for monitorhøjttaler
- VU-meter til zone og monitor
- Justerbar hovedtelefonudgang
- Tilsluttes stikkontakt eller benytter 24 V nødstrømforsyning

## Technical data:

|  |   |
|--|---|
| Peak output power                        | : -   |
| Power rating                             | : -   |
| Power rating at 2 Ohm                    | : -   |
| Power rating at 4 Ohm                    | : -   |
| Power rating at 8 Ohm                    | : -   |
| Power rating at 16 Ohm                   | : -   |
| Power rating at 100 V                    | : -   |
| Power rating with 4 Ohm                  | : -   |
| bridged operation                        |   |
| Power rating with 8 Ohm                  | : -   |
| bridged operation                        |   |
| Output impedance                         | : -   |
| Channels                                 | : 5   |
| Zones                                    | : 4   |
| Inputs                                   | : 5 mV/4 kOhm, 100 mV/10 kOhm (mic/line), 100 mV/30 kOhm (line) |
| Attenuation factor                       | : -   |
| Frequency range                          | : 50-17,000 Hz  |
| Crossover network                        | : -   |
| Crossover frequency                      | : -   |
| Integrated limiter                       | : -   |
| Equalizer bass                           | : $\pm 10$ dB/100 Hz  |
| Equalizer midrange                       | : -   |
| Equalizer treble                         | : $\pm 10$ dB/10 kHz  |
| S/N ratio                                | : ? 65 dB (mic), ? 75 dB (line)                                 |
| Crosstalk attenuation                    | : -   |
| THD                                      | : < 1%  |
| Phantom power                            | : 15 V  |
| Mains voltage                            | : $\sim$ 230 V  |
| Mains frequency                          | : 50 Hz   |
| Power consumption, operation             | : 20 VA   |
| Power consumption, standby               | : -   |
| Standby current                          | : -   |
| Operating voltage (possible alternative) | : DC 24 V   |
| Power supply (possible alternative)      | : DC 600 mA   |
| Admiss. ambient temp.                    | : 0-40 °C   |

Width  
Height

: 482 mm  
: 133 mm





|                                |   |
|--------------------------------|---|
| Depth                          | : 220 mm  |
| Rack units, RU                 | : 3   |
| Weight                         | : 4.5 kg  |
| Connections                    | : 3 x combo 6.3 mm/XLR (mic/line), 2 x RCA L/R (line),<br>4 x plug-in screw terminal (zones), screw contacts<br>(monitor speakers), screw contacts (mix out), screw<br>contacts (paging), screw contacts (priority) |
| Packing dimensions (W x H x L) | : 0.28 x 0.22 x 0.57 m  |
| Gross weight                   | : 5.68 kg   |
| Net weight                     | : 4.7 kg  |