



DT-28N - HiFi Dome Tweeter

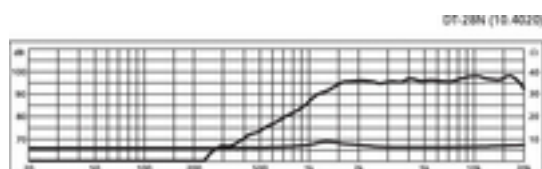

DT-28N

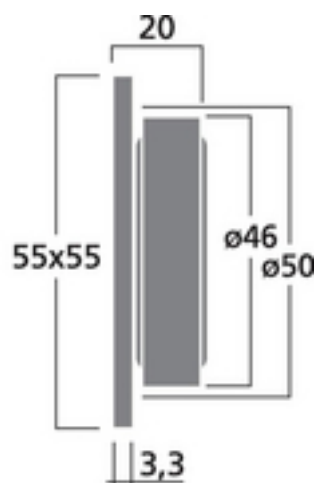

Neodymium hi-fi tweeter, 50 W, 8 Ohm

- Outstanding sound characteristics
- Very linear reproduction, even of lower frequencies
- High efficiency
- 28 mm extra efficient silk cone
- Perfectly small front plate for high-performance speaker systems of the smallest size possible
- Mounting into perfect D'Appolito arrangements also in lying centres due to low magnetic dispersion

Technical data:

Impedance (Z)	: 8 Ohm
Transmission technology	: -
Frequency range	: fx-20,000 Hz
Resonant frequency (fs)	: 1,200 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 2,000 Hz
Power rating (RMS)	: 50 W
Peak music power output (MAX)	: 100 W
SPL	: 94 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: \tilde{A} 28 mm
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: \tilde{A} 46 mm
Mounting cutout	: \tilde{A} 50 mm
Mounting depth	: 16.7 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 55 x 55 x 20 mm
Outside diameter	: -



Width	: 55 mm
Height	: 55 mm
Depth	: 20 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.074 kg
Packing unit	: 1
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.075 x 0.035 x 0.075 m
Gross weight	: 0.096 kg
Net weight	: 0.074 kg
Low-impedance	: 1