


ECM-10/WS - Desk Microphone

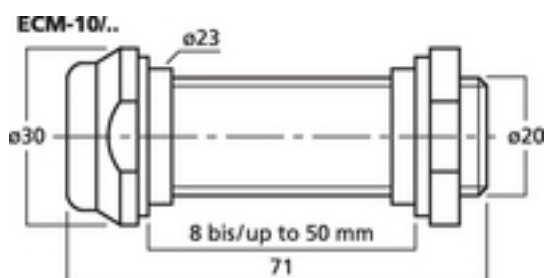

Built-in electret microphones

- Particularly suitable for PA applications
- Metal housing
- Black (SW) or white (WS) cartridge cover

Technical data:

| | |
|--------------------------------|----------------------------|
| Description | : built-in microphone |
| Version | : - |
| Transmission method | : cable |
| Polar pattern | : omnidir. |
| System | : electret |
| Carrier frequency range | : - |
| Transmitting power | : - |
| Power supply | : - |
| Operating time | : - |
| Audio frequency range | : 30-17,000 Hz |
| Nominal impedance | : 300 Ohm |
| Sensitivity | : 2.3 mV/Pa |
| S/N ratio | : - |
| Max. sound pressure | : 110 dB |
| Power supply | : DC 9-48 V, phantom power |
| Gooseneck length | : - |
| Housing material | : metal |
| Admiss. ambient temp. | : 0-40 °C |
| Dimensions | : ~ 30 mm x 71 mm |
| Weight | : 95 g |
| Cable | : - |
| Connection | : XRL, bal. |
| Packing dimensions (W x H x L) | : 0.07 x 0.045 x 0.12 m |
| Gross weight | : 0.165 kg |
| Net weight | : 0.095 kg |