


## EDL-612EN - PA Ceiling Speaker

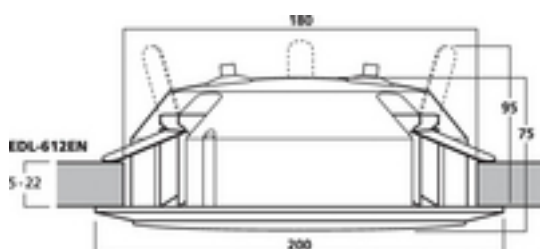

PA ceiling speaker,  
with EN 54-24 certification.

- 100 V transmission technology with 3 power taps 12/6/3 W
- Type 165 full range speaker with optimised voice reproduction
- Plastic cover with low mounting depth
- For a ceiling thickness from 5 to 22 mm
- Quick installation
- Robust metal basket and protective grille

## Technical data:

Impedance (Z)	: -
Transmission technology	: 100 V
Frequency range	: 120-15,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 12/6/3 W
Peak music power output (MAX)	: -
SPL	: 93 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\varnothing$ 180 mm
Mounting depth	: 60 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing$ 200 mm x 70 mm
Outside diameter	: $\varnothing$ 200 mm

Width	: Å~ 200 mm
Height	: -
Depth	: 70 mm
Colour	: white
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 950 g
Packing unit	: -
Type of speaker	: 165
Packing dimensions (W x H x L)	: 0.25 x 0.1 x 0.24 m
Gross weight	: 1.187 kg
Net weight	: 0.954 kg
100 V	: 1
EN 54 certification	: 1