


# EDL-25 - PA Loudspeaker

**100V**

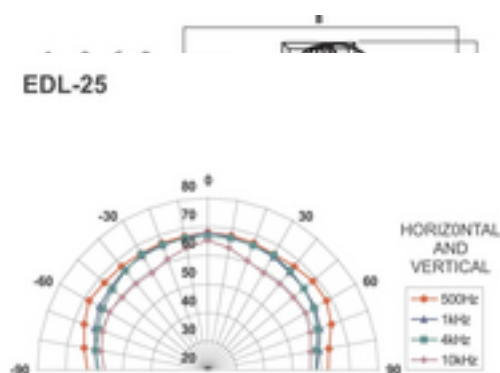

## PA loftshøjttaler

- 100 V line-teknologi via audiotransformer med tapsætning
- Full range højttaler med dual membran
- Plastikkabinat med frontgitter i metal
- Udført i ABS-plast, som er selvslukkende i overensstemmelse med UL-94V-0
- Til lofter med en tykkelse fra 10 til 40 mm

## Technical data:

Impedance (Z)	: -
Transmission technology	: 100 V
Frequency range	: 100-14,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 6/3/1.5 W
Peak music power output (MAX)	: -
SPL	: 87 dB/W/m
Max. rated SPL	: 94 dB
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: Å~ 165 mm
Mounting depth	: 60 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: Å~ 205 mm x 70 mm
Outside diameter	: Å~ 205 mm

Width	: Å~ 205 mm
Height	: -
Depth	: 70 mm
Colour	: white
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.724 kg
Packing unit	: 1
Type of speaker	: 130
Packing dimensions (W x H x L)	: 0.205 x 0.07 x 0.205 m
Gross weight	: 0.832 kg
Net weight	: 0.724 kg
100 V	: 1