


EPS32 - Forstærker 2x15W DIN

new

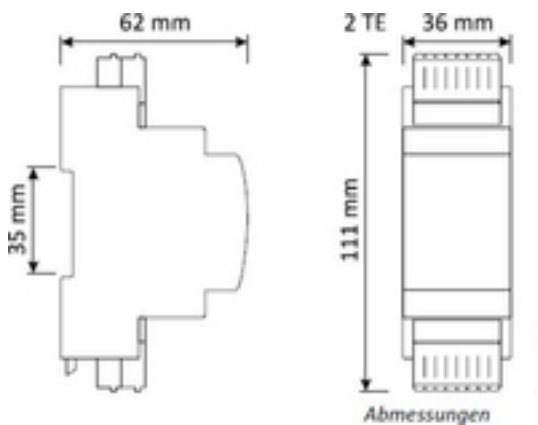

Amplifier, 2 x 15 W

- For mounting onto DIN rails according to DIN EN 60529, 2 HP
- 2-channel class D amplifier
- Selectable mode stereo/bridged
- Inputs to be switched externally
- Input balanced and unbalanced
- Summing amplifier input
- Microphone input
- Separate volume control for each channel

- High-efficiency green design

Technical data:

Peak output power	: 30 W
Power rating	: -
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: 2 x 12 W
Power rating at 8 Ohm	: 2 x 6 W
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm bridged operation	: 1 x 24 W
Power rating with 8 Ohm bridged operation	: 1 x 12 W
Output impedance	: 4-8 Ohm
Channels	: 2
Zones	: -
Inputs	: 1 V/47 kOhm (bal.), 22 kOhm (unbal.)
Attenuation factor	: -
Frequency range	: 42-21,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: -
Equalizer midrange	: -
Equalizer treble	: -
S/N ratio	: 92 dB
Crosstalk attenuation	: -
THD	: 0.05%
Phantom power	: 9-12 V
Mains voltage	: -
Mains frequency	: -
Power consumption, operation	: -
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: DC 12-26 V, rec. DC 24 V
Power supply (possible alternative)	: -
Admiss. ambient temp.	: -20 °C to +40 °C
Width	: 36 mm
Height	: 101 mm

Depth	: 62 mm
Rack units, RU	: -
Weight	: 98 g
Connections	: spring-loaded terminals
Packing dimensions (W x H x L)	: 0.037 x 0.095 x 0.075 m
Gross weight	: 0.1297 kg
Net weight	: 0.098 kg