


PA-4240 - PA Amplifier

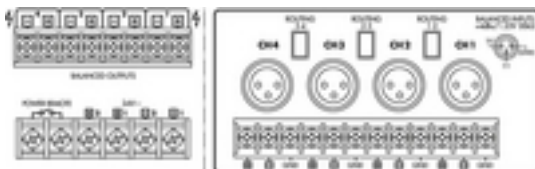

PA power amplifier

- 4 x 240 W
- Routing switches for parallel operation on 2 channels each
- Temperature-controlled fan
- Connection for external on/off switch
- LED indication for clip, protect, overtemperature and output level
- Mains operation or 24 V emergency power operation

Technical data:

| | |
|---|--|
| 100 V | : 1 |
| Low-impedance | : 1 |
| Peak output power | : - |
| Power rating | : 960 W |
| Power rating at 2 Ohm | : - |
| Power rating at 4 Ohm | : 4 x 240 W |
| Power rating at 8 Ohm | : - |
| Power rating at 16 Ohm | : - |
| Power rating at 100 V | : 4 x 240 W |
| Power rating with 4 Ohm bridged operation | : - |
| Power rating with 8 Ohm bridged operation | : - |
| Output impedance | : 31Â V/4Â Ohm, 50Â V/10.4Â Ohm, 70Â V/20Â Ohm, 100Â V/42Â Ohm |
| Channels | : 4 |
| Zones | : - |
| Inputs | : 1.2Â V, bal. |
| Attenuation factor | : - |
| Frequency range | : 55-17,000 Hz |
| Crossover network | : - |
| Crossover frequency | : - |
| Integrated limiter | : - |
| Equalizer bass | : - |
| Equalizer midrange | : - |
| Equalizer treble | : - |
| S/N ratio | : ? 90 dB(A) |
| Crosstalk attenuation | : - |
| THD | : < 1% |
| Phantom power | : |
| Mains voltage | : ~ 230 V |
| Mains frequency | : 50 Hz |
| Power consumption, operation | : 2,720 VA |
| Power consumption, standby | : - |
| Standby current | : - |
| Operating voltage (possible alternative) | : DC 24 V |
| Power supply (possible alternative) | : DC 113 A |

Admiss. ambient temp.

: 0-40 °C





| | |
|--------------------------------|---|
| Width | : 483 mm |
| Height | : 133 mm |
| Depth | : 370 mm |
| Rack units, RU | : 3 |
| Weight | : 28 kg |
| Connections | : 4 x XLR (inputs), screw contacts (speakers) |
| | |
| Packing dimensions (W x H x L) | : 0.55 x 0.21 x 0.49 m |
| Gross weight | : 30.54 kg |
| Net weight | : 28.62 kg |