


SP-45/8 - Mini Bass Speaker

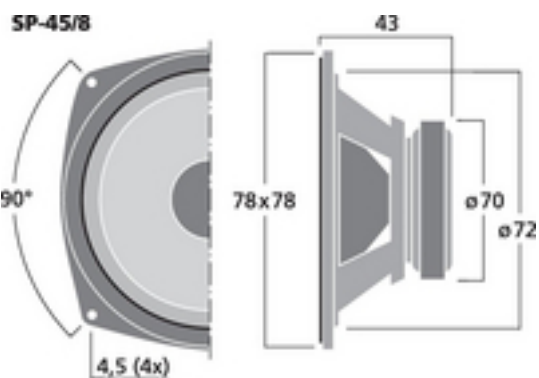

Bass-midrange speakers, 20 W, 8 Ohm (/8) and 4 Ohm (/4)
Particularly suitable for mini speaker systems and column speakers.

Technical data:

| | |
|---|----------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission technology | : - |
| Frequency range | : f3-16,000 Hz |
| Resonant frequency (fs) | : 120 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 20 W |
| Peak music power output (MAX) | : 40 W |
| SPL | : 88 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 1.1 mm/N |
| Moving mass (Mms) | : 1.6 g |
| Mech. Q factor (Qms) | : 2.82 |
| Electr. Q factor (Qes) | : 0.68 |
| Total Q factor (Qts) | : 0.55 |
| Equivalent volume (Vas) | : 1.5 l |
| DC resistance (Re) | : 6.5 Ohm |
| Force factor (BxL) | : 3.40 Tm |
| Voice coil induct. (Le) | : 0.15 mH |
| Voice coil diameter | : \tilde{A} 19 mm |
| Voice coil former | : aluminium |
| Linear excursion (X _{MAX}) | : \pm 0.75 mm |
| Eff. cone area (Sd) | : 31 cm ² |
| Magnet weight | : 150 g |
| Magnet diameter | : \tilde{A} 70 mm |
| Mounting cutout | : \tilde{A} 72 mm |
| Mounting depth | : 43 mm |
| Mounting hole diameter | : \tilde{A} 84 mm |
| Hole spacing X-axis | : 59.5 mm |
| Hole spacing Y-axis | : 59.5 mm |
| Dimensions | : 78 x 78 x 43 mm |
| Outside diameter | : \tilde{A} 93 mm |

| | |
|--------------------------------|---------------------------|
| Width | : 78 mm |
| Height | : 78 mm |
| Depth | : 43 mm |
| Colour | : black |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.411 kg |
| Packing unit | : 1 |
| Type of speaker | : 3" |
| Packing dimensions (W x H x L) | : 0.085 x 0.055 x 0.085 m |
| Gross weight | : 0.425 kg |
| Net weight | : 0.411 kg |
| Low-impedance | : 1 |