


## WALL-04T/SW - PA Speaker Cabinet

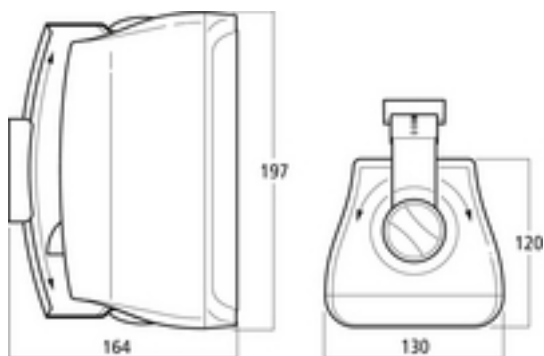

Pair of 2-way PA speaker systems

- 100 V wall speaker with plastic cabinet in black
- 4 power taps as well as switchable to 8 Ohm operation
- 10 cm (4") bass-midrange speaker and 12 mm (½") dome tweeter
- High sound quality and speech intelligibility
- Mounting bracket for pivoting and tilting
- Connecting terminal with cover

## Technical data:

Outdoors	: 1
100 V	: 1
Low-impedance	: 1
Active/passive	: passive
Transmission technology	: 100 V
Total output power	: -
Power rating (RMS)	: -
Total power rating	: 60 W
Power rating (RMS)	: 16/8/4/2 W (100 V) 30 W (8 Ohm)
Impedance	: 8 Ohm
Frequency range	: 90-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: 2-way
Full range speaker	: -
Bass speaker	: 10 cm (4") bass-midrange speaker
Midrange speaker	: -
Tweeter	: 12 mm (½") dome tweeter
Number of speakers	: 2
Speaker size	: 4"
SPL	: 87 dB/W/m
Max. rated SPL	: 100 dB
Radiation angle/beam angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Features	: -
Housing material	: plastic
Colour	: black
Mounting device	: mounting bracket
Protected against ball rebound	: -
Protection class	: IP65
Admiss. ambient temp.	: 0-40 °C
Power supply	: -
Dimensions	: 130 x 197 x 164 mm (with bracket)

Width	: 130 mm
Height	: 197 mm
Depth	: 164 mm
Weight	: 1.8 kg
Inputs	: spring-load. speaker term.
Outputs	: -
Replacement voice coil	: -
Other features	: for pivoting and tilting
Accessories	: -
Packing dimensions (W x H x L)	: 0.155 x 0.22 x 0.335 m
Gross weight	: 3.82 kg
Net weight	: 3.51 kg