


## IT-130AK - Active Horn Speaker

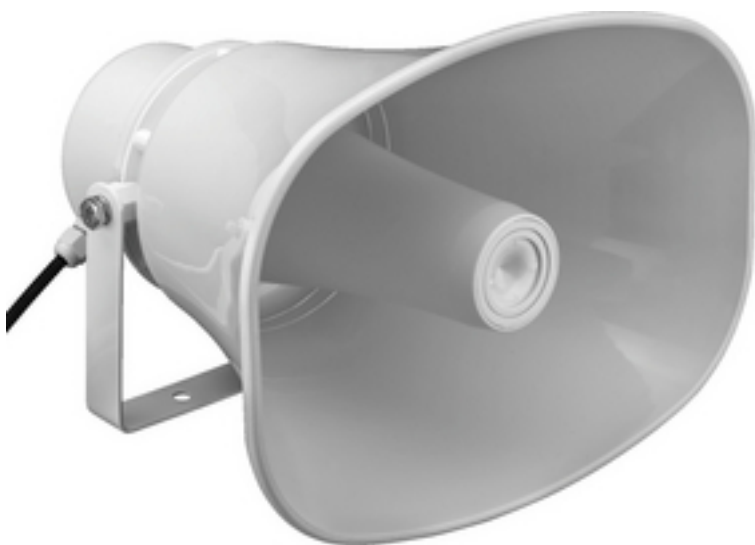

Active weatherproof horn speaker

- Weatherproof and IP66 tested
- Integrated 30 W amplifier
- Volume control
- Easy replaceable connection cables via screw terminals
- Mobile application possible due to voltage supply of 12-24 V DC/2.5 A

## Technical data:

|                                |                        |
|--------------------------------|------------------------|
| Outdoors                       | : 1                    |
| weatherproof                   | : 1                    |
| active                         | : 1                    |
| Active/passive                 | : active               |
| Transmission technology        | : cable                |
| Total output power             | : 30 W                 |
| Power rating (RMS)             | : -                    |
| Total power rating             | : -                    |
| Power rating (RMS)             | : -                    |
| Impedance                      | : -                    |
| Frequency range                | : 250-16,000 Hz        |
| THD                            | : -                    |
| S/N ratio                      | : -                    |
| Input signal                   | : 750 mV/5 kOhm (line) |
| System                         | : -                    |
| Full range speaker             | : -                    |
| Bass speaker                   | : -                    |
| Midrange speaker               | : -                    |
| Tweeter                        | : -                    |
| Number of speakers             | : 1                    |
| Speaker size                   | : -                    |
| SPL                            | : 109 dB/W/m           |
| Max. rated SPL                 | : -                    |
| Radiation angle/beam angle     | : -                    |
| Radiation angle, horizontal    | : -                    |
| Radiation angle, vertical      | : -                    |
| Features                       | : volume control       |
| Housing material               | : ABS                  |
| Colour                         | : white                |
| Mounting device                | : mounting bracket     |
| Protected against ball rebound | : -                    |
| Protection class               | : IP66                 |
| Admiss. ambient temp.          | : -20 °C to +50 °C     |
| Power supply                   | : 12-24 V DC/2.5 A     |
| Dimensions                     | : 290 x 215 x 260 mm   |

|                                |                         |
|--------------------------------|-------------------------|
| Width                          | : 290 mm                |
| Height                         | : 215 mm                |
| Depth                          | : 260 mm                |
| Weight                         | : 1.5 kg                |
| Inputs                         | : open cable ends       |
| Outputs                        | : -                     |
| Replacement voice coil         | : -                     |
| Other features                 | : weatherproof          |
| Accessories                    | : -                     |
| Packing dimensions (W x H x L) | : 0.218 x 0.285 x 0.3 m |
| Gross weight                   | : 1.84 kg               |
| Net weight                     | : 1.5 kg                |