
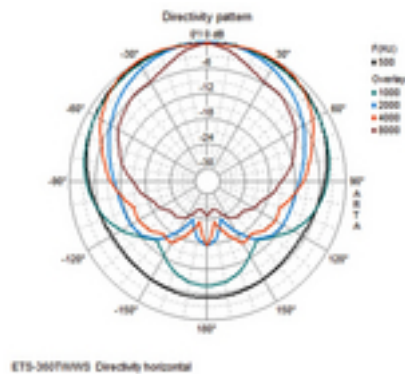


ETS-360TW/WS - PA Speaker Column

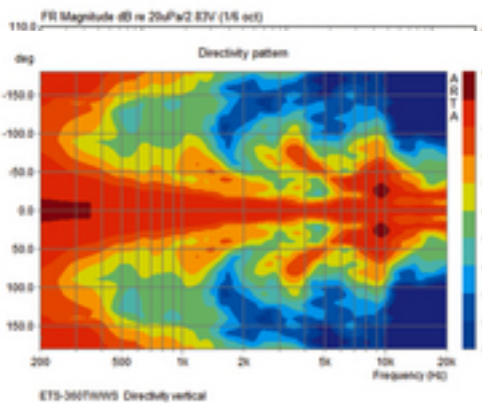

The new generation of column speakers from MONACOR:

All the advantages of a column speaker (shape, directional characteristic and mounting) are now combined with an excellent sound quality and a particularly high level stability. With the 2½-way ETS speakers (ETS-360TW/WS) or 3-way ETS speakers (ETS-340TW/WS) in a wooden cabinet with white decorative surface with wood pattern, most varying requirements can be met by these speaker systems, like a very good speech intelligibility and at the same time an optimised music reproduction of the full range.

High-end column speaker,
(indoors), 100 V.

Column speaker in a wooden cabinet of compact size, coated with high-quality foils in decorative wood pattern, 2½-way technology with tweeter (25 mm textile dome), clearly extended frequency range compared



with standard full range column speakers. The ETS-360TW/WS speaker impresses with an incredibly dynamic and complete sound, a convincing speech intelligibility and an amazing sound even at higher volume levels.

- 2 bass speakers, 4 bass-midrange speakers, 1 tweeter
- Spring-loaded terminal with 3 power taps
- 2 x M8 threaded bushing
- Supplied with mounting bracket
- Metal front grille

PROSOUND 01/2008

“Can be integrated into almost any architectural style without any problems. These speaker systems can be operated somewhere for 20 years without being noticed.”

Technical data:

100 V	: 1
Active/passive	: passive
Transmission technology	: 100 V
Total output power	: -
Power rating (RMS)	: -
Total power rating	: -
Power rating (RMS)	: 60/30/15 W
Impedance	: -
Frequency range	: 90-19,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: -
Full range speaker	: -
Bass speaker	: 2
Midrange speaker	: 4
Tweeter	: 1
Number of speakers	: 6+1
Speaker size	: -
SPL	: 94 dB/W/m
Max. rated SPL	: -
Radiation angle/beam angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Features	: -
Housing material	: wood
Colour	: white
Mounting device	: mounting brackets
Protected against ball rebound	: -
Protection class	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: -
Dimensions	: 135 x 825 x 110 mm
Width	: 135 mm
Height	: 825 mm

Depth	: 110 mm
Weight	: 7.3 kg
Inputs	: -
Outputs	: -
Replacement voice coil	: -
Other features	: -
Accessories	: -
Packing dimensions (W x H x L)	: 0.21 x 0.18 x 0.93 m
Gross weight	: 8.32 kg
Net weight	: 7.68 kg