

# EDL-420/SW - PA Loudspeaker


100V

8Ω



IP44

new

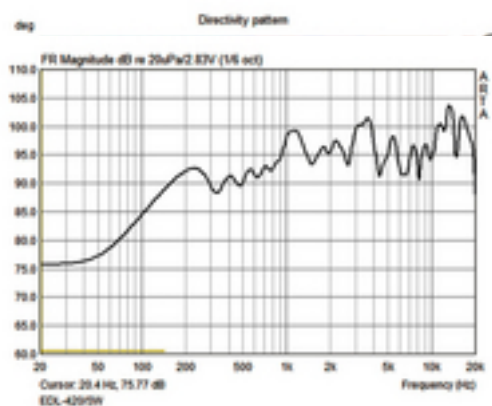

Weatherproof PA ball speaker

- 100 V transmission technology or 8 Ohm operation
- Black ABS housing (self-extinguishing, complies with standard UL 94V-0)
- Supplied with 480 cm connection cable and canopy

## Technical data:

Outdoors	: 1
weatherproof	: 1
100 V	: 1
Low-impedance	: 1
Active/passive	: passive
Transmission technology	: 100 V or low-impedance
Total output power	: -
Power rating (RMS)	: -
Total power rating	: -
Power rating (RMS)	: 20/10/5 W
Impedance	: 8 Ohm
Frequency range	: 120-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: -
Full range speaker	: 160 mm (6")
Bass speaker	: -
Midrange speaker	: -
Tweeter	: -
Number of speakers	: 1
Speaker size	: -
SPL	: 94 dB/W/m
Max. rated SPL	: -
Radiation angle/beam angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Features	: -
Housing material	: ABS, UL 94V-0
Colour	: black
Mounting device	: cable with canopy
Protected against ball rebound	: -
Protection class	: IP44
Admiss. ambient temp.	: -30 °C to +40 °C
Power supply	: -

Dimensions	: ~ 265 mm
Width	: ~ 265 mm
Height	: -
Depth	: -
Weight	: 2.3 kg
Inputs	: -
Outputs	: -
Replacement voice coil	: -
Other features	: -
Accessories	: -
Packing dimensions (W x H x L)	: 0.305 x 0.285 x 0.38 m
Gross weight	: 2.84 kg
Net weight	: 2.34 kg