


## SPE-140/WS - Loudspeaker

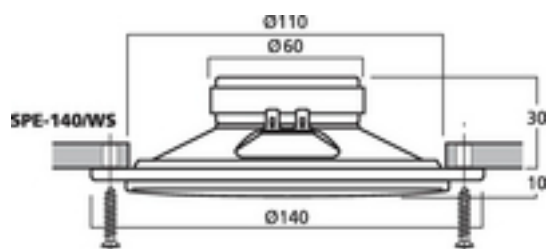

### Indbygningshøjttaler, 10 W

- Dual membran for full range lyd gengivelse
- Slankt design
- Fast metal frontgitter
- Velegnet til indendørs annonceringer og baggrundsmusik

## Technical data:

|   |                                |
|---|--------------------------------|
| Impedance (Z)                             | : 4 Ohm                        |
| Transmission technology                   | : -                            |
| Frequency range                           | : 120-12,000 Hz                |
| Resonant frequency (fs)                   | : -                            |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                            |
| Power rating (RMS)                        | : 10 W                         |
| Peak music power output (MAX)             | : 20 W                         |
| SPL                                       | : 87 dB/W/m                    |
| Max. rated SPL                            | : -                            |
| Max. voltage                              | : -                            |
| Radiation angle                           | : -                            |
| Radiation angle, horizontal               | : -                            |
| Radiation angle, vertical                 | : -                            |
| Suspension compl. (Cms)                   | : -                            |
| Moving mass (Mms)                         | : -                            |
| Mech. Q factor (Qms)                      | : -                            |
| Electr. Q factor (Qes)                    | : -                            |
| Total Q factor (Qts)                      | : -                            |
| Equivalent volume (Vas)                   | : -                            |
| DC resistance (Re)                        | : -                            |
| Force factor (BxL)                        | : -                            |
| Voice coil induct. (Le)                   | : -                            |
| Voice coil diameter                       | : -                            |
| Voice coil former                         | : -                            |
| Linear excursion (X <sub>MAX</sub> )      | : -                            |
| Eff. cone area (Sd)                       | : -                            |
| Magnet weight                             | : -                            |
| Magnet diameter                           | : -                            |
| Mounting cutout                           | : $\sim 110$ mm                |
| Mounting depth                            | : 30 mm                        |
| Mounting hole diameter                    | : -                            |
| Hole spacing X-axis                       | : -                            |
| Hole spacing Y-axis                       | : -                            |
| Dimensions                                | : $\sim 140$ mm $\times$ 40 mm |
| Outside diameter                          | : $\sim 140$ mm                |

|                                |                           |
|--------------------------------|---------------------------|
| Width                          | : Å~ 140 mm               |
| Height                         | : -                       |
| Depth                          | : 40 mm                   |
| Colour                         | : white                   |
| Protective class               | : -                       |
| Admiss. ambient temp.          | : 0-40 °C                 |
| Weight                         | : 311 g                   |
| Packing unit                   | : 1                       |
| Type of speaker                | : 130                     |
| Packing dimensions (W x H x L) | : 0.145 x 0.045 x 0.145 m |
| Gross weight                   | : 0.344 kg                |
| Net weight                     | : 0.311 kg                |
| Low-impedance                  | : 1                       |