


## SPE-15F/WS - Marine Loudspeaker

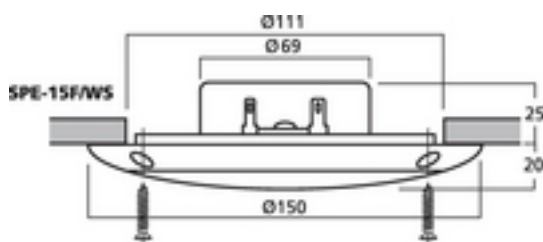

**Vejrbestandige PA-indbygningshøjttalere, sæt, 15 W**, med UV-stabiliseret plastikkabinet, slankt design. Alsidige anvendelsesmuligheder, fx i bilen, til PA, på terrassen, skibet eller i poolområdet.

- Vejrbestandig polypropylenmembran
- Testet i overensstemmelse med ASTM B117 (400 timers saltsprøjtetest)
- Lavt magnetspredningsfelt
- Leveres med monteringstilbehør i rustfrit stål og tilslutningskabel

## Technical data:

|   |                       |
|---|-----------------------|
| Impedance (Z)                             | : 4 Ohm               |
| Transmission technology                   | : -                   |
| Frequency range                           | : 80-16,000 Hz        |
| Resonant frequency (fs)                   | : -                   |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                   |
| Power rating (RMS)                        | : 15 W                |
| Peak music power output (MAX)             | : 30 W                |
| SPL                                       | : 86 dB/W/m           |
| Max. rated SPL                            | : -                   |
| Max. voltage                              | : -                   |
| Radiation angle                           | : -                   |
| Radiation angle, horizontal               | : -                   |
| Radiation angle, vertical                 | : -                   |
| Suspension compl. (Cms)                   | : -                   |
| Moving mass (Mms)                         | : -                   |
| Mech. Q factor (Qms)                      | : -                   |
| Electr. Q factor (Qes)                    | : -                   |
| Total Q factor (Qts)                      | : -                   |
| Equivalent volume (Vas)                   | : -                   |
| DC resistance (Re)                        | : -                   |
| Force factor (BxL)                        | : -                   |
| Voice coil induct. (Le)                   | : -                   |
| Voice coil diameter                       | : -                   |
| Voice coil former                         | : -                   |
| Linear excursion (X <sub>MAX</sub> )      | : -                   |
| Eff. cone area (Sd)                       | : -                   |
| Magnet weight                             | : 83 g                |
| Magnet diameter                           | : -                   |
| Mounting cutout                           | : Å~ 111 mm           |
| Mounting depth                            | : 25 mm               |
| Mounting hole diameter                    | : -                   |
| Hole spacing X-axis                       | : -                   |
| Hole spacing Y-axis                       | : -                   |
| Dimensions                                | : Å~ 150Å mm x 45Å mm |
| Outside diameter                          | : Å~ 150 mm           |

|                                |                         |
|--------------------------------|-------------------------|
| Width                          | : Å~ 150 mm             |
| Height                         | : -                     |
| Depth                          | : 45 mm                 |
| Colour                         | : white                 |
| Protective class               | : IP65                  |
| Admiss. ambient temp.          | : 0-40 °C               |
| Weight                         | : 270 g                 |
| Packing unit                   | : 2                     |
| Type of speaker                | : 130                   |
| Packing dimensions (W x H x L) | : 0.16 x 0.06 x 0.315 m |
| Gross weight                   | : 0.83 kg               |
| Net weight                     | : 0.645 kg              |
| Outdoors                       | : 1                     |
| weatherproof                   | : 1                     |
| Low-impedance                  | : 1                     |