


PA-4040MPX - Pre-Amplifier

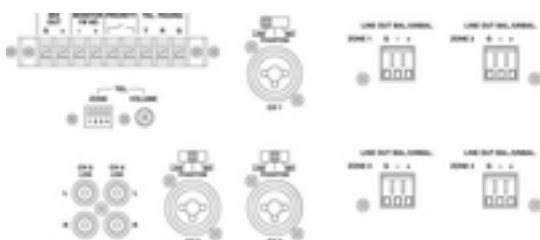

4-zoners mixer, til generel "multi-room" anvendelse.

- 4 zoner med routing-funktion for alle indgange
- 3 mikrofon-/line-indgange
- 2 stereo indgange, phono
- Alle indgange har gain, 2-vejs tonekontrol og zonevælger
- Mikrofonindgange med +15 V phantom strømforsyning
- Prioritet for kanal 1
- Separat paging-indgang, som kan routes til alle zoner
- 4 zone-udgange, som kan justeres individuelt
- Tilslutning for monitorhøjttaler
- VU-meter til zone og monitor
- Justerbar hovedtelefonudgang
- Tilsluttes stikkontakt eller benytter 24 V nødstrømforsyning

Technical data:

Peak output power	: -
Power rating	: -
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: -
Power rating at 8 Ohm	: -
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm	: -
bridged operation	
Power rating with 8 Ohm	: -
bridged operation	
Output impedance	: -
Channels	: 5
Zones	: 4
Inputs	: 5 mV/4 kOhm, 100 mV/10 kOhm (mic/line), 100 mV/30 kOhm (line)
Attenuation factor	: -
Frequency range	: 50-17,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: ± 10 dB/100 Hz
Equalizer midrange	: -
Equalizer treble	: ± 10 dB/10 kHz
S/N ratio	: ? 65 dB (mic), ? 75 dB (line)
Crosstalk attenuation	: -
THD	: < 1%
Phantom power	: 15 V
Mains voltage	: \sim 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 20 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: DC 24 V
Power supply (possible alternative)	: DC 600 mA
Admiss. ambient temp.	: 0-40 °C

Width
Height

: 482 mm
: 133 mm





Depth	: 220 mm
Rack units, RU	: 3
Weight	: 4.5 kg
Connections	: 3 x combo 6.3 mm/XLR (mic/line), 2 x RCA L/R (line), 4 x plug-in screw terminal (zones), screw contacts (monitor speakers), screw contacts (mix out), screw contacts (paging), screw contacts (priority)
Packing dimensions (W x H x L)	: 0.28 x 0.22 x 0.57 m
Gross weight	: 5.68 kg
Net weight	: 4.7 kg