
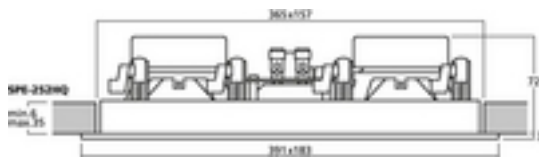


## SPE-252HQ - Loudspeaker

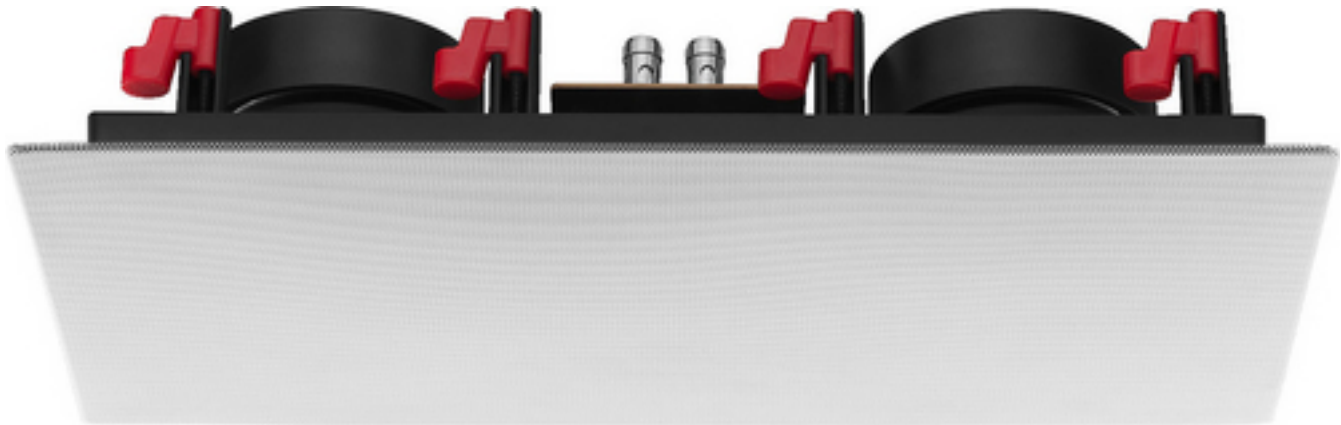

Hi-fi wall and ceiling speaker, 50 W, 8 Ohm

- 2-way version with dual bass speaker and dome tweeter
- 2 x 13 cm (5") bass speaker and 25 mm (1") silk dome
- Excellent sound characteristics
- Protective metal grille
- Protective grille magnetically attached to the speaker front
- Ideally suited e.g. as a centre speaker
- For a wall thickness/ceiling thickness from 6 to 35 mm

## Technical data:

Impedance (Z)	: 8 Ohm
Transmission technology	: -
Frequency range	: 60-20,000 Hz
Resonant frequency (fs)	: 65 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 50 W
Peak music power output (MAX)	: 100 W
SPL	: 88 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: 365 x 157 mm
Mounting depth	: 72 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: 391 x 183 x 75 mm
Outside diameter	: -



Width	: 391 mm
Height	: 183 mm
Depth	: 75 mm
Colour	: white/black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 2.6 kg
Packing unit	: 1
Type of speaker	: 2 x 130
Packing dimensions (W x H x L)	: 0.225 x 0.12 x 0.435 m
Gross weight	: 3.05 kg
Net weight	: 2.62 kg
Low-impedance	: 1