



## ESP-22/WS - PA Wall Speaker

100V

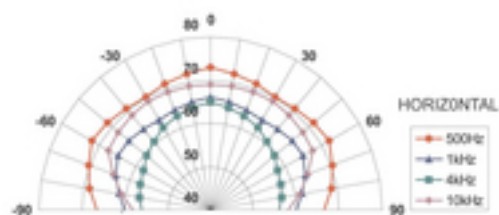

ESP-22/WS

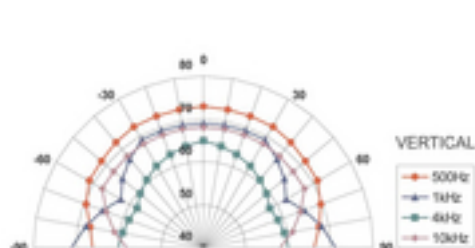

### PA Hi-Fi væg- og loftshøjttalere

- 100 V line-teknologi, 2-vejs version med dome tweeter (justerbar i ESP-17/WS, ESP-22/WS og ESP-32/WS)
- Plastkabinnet med frontgitter i metal
- Udført i ABS-plast, som er selvslukkende i overensstemmelse med UL 94V-0
- Fremragende lydegenskaber
- Til vægge og lofter med en tykkelse fra 8 til 35 mm

## Technical data:

|   |                      |
|---|----------------------|
| Impedance (Z)                             | : -                  |
| Transmission technology                   | : 100 V              |
| Frequency range                           | : 50-20,000 Hz       |
| Resonant frequency (fs)                   | : -                  |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                  |
| Power rating (RMS)                        | : 20/15/10/5/2.5 W   |
| Peak music power output (MAX)             | : -                  |
| SPL                                       | : 88 dB/W/m          |
| Max. rated SPL                            | : -                  |
| Max. voltage                              | : -                  |
| Radiation angle                           | : -                  |
| Radiation angle, horizontal               | : -                  |
| Radiation angle, vertical                 | : -                  |
| Suspension compl. (Cms)                   | : -                  |
| Moving mass (Mms)                         | : -                  |
| Mech. Q factor (Qms)                      | : -                  |
| Electr. Q factor (Qes)                    | : -                  |
| Total Q factor (Qts)                      | : -                  |
| Equivalent volume (Vas)                   | : -                  |
| DC resistance (Re)                        | : -                  |
| Force factor (BxL)                        | : -                  |
| Voice coil induct. (Le)                   | : -                  |
| Voice coil diameter                       | : -                  |
| Voice coil former                         | : -                  |
| Linear excursion (X <sub>MAX</sub> )      | : -                  |
| Eff. cone area (Sd)                       | : -                  |
| Magnet weight                             | : -                  |
| Magnet diameter                           | : -                  |
| Mounting cutout                           | : 275 x 190 mm       |
| Mounting depth                            | : 90 mm              |
| Mounting hole diameter                    | : -                  |
| Hole spacing X-axis                       | : -                  |
| Hole spacing Y-axis                       | : -                  |
| Dimensions                                | : 306 x 220 x 100 mm |
| Outside diameter                          | : -                  |



|                                |                        |
|--------------------------------|------------------------|
| Width                          | : 306 mm               |
| Height                         | : 220 mm               |
| Depth                          | : 100 mm               |
| Colour                         | : white                |
| Protective class               | : -                    |
| Admiss. ambient temp.          | : 0-40 °C              |
| Weight                         | : 2.6 kg               |
| Packing unit                   | : 1                    |
| Type of speaker                | : 165                  |
| Packing dimensions (W x H x L) | : 0.27 x 0.13 x 0.35 m |
| Gross weight                   | : 2.955 kg             |
| Net weight                     | : 2.585 kg             |
| 100 V                          | : 1                    |