


## STA-300D - Amplifier

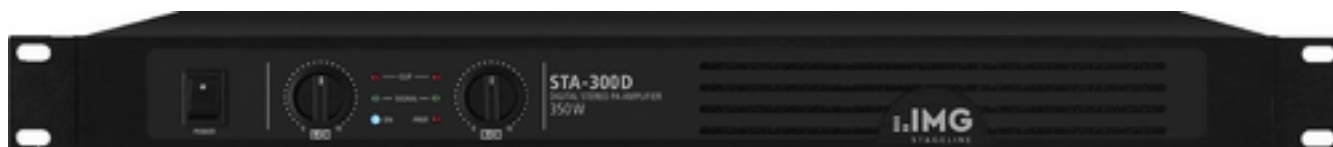

### Stereo class D PA-forstærker

- Stereo eller brokobling
- Limiter funktion
- 2 x volumenkontrol
- Temperaturstyret ventilator
- Beskyttelseskredsløb med LED-indikator for beskyttelse mod kortslutning, overophedning og overspænding ved udgangene
- Hver kanal har LED-indikator for overbelastning (clip) og signal

## Technical data:

Bridged operation	: 1
Peak output power	: 350 W
Power rating	: 300 W
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: 2 x 150 W
Power rating at 8 Ohm	: 2 x 100 W
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm	: -
bridged operation	
Power rating with 8 Ohm	: 1 x 300 W
bridged operation	
Output impedance	: -
Channels	: 2
Zones	: -
Inputs	: 1Â V/12 kOhm
Attenuation factor	: -
Frequency range	: 20-20,000Â Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: yes
Equalizer bass	: -
Equalizer midrange	: -
Equalizer treble	: -
S/N ratio	: ? 96 dB
Crosstalk attenuation	: ? 70 dB
THD	: < 0.05%
Phantom power	: -
Mains voltage	: ~ 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 510 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: -
Power supply (possible alternative)	: -
Admiss. ambient temp.	: 0-40 °C
Width	: 482 mm

Height	: 52 mm
Depth	: 290 mm
Rack units, RU	: 1
Weight	: 3.7 kg
Connections	: 1 x 3-pole XLR L/R 1 x 6.3 mm jack L/R 1 x SPEAKER L/R
Packing dimensions (W x H x L)	: 0.38 x 0.11 x 0.55 m
Gross weight	: 4.75 kg
Net weight	: 3.84 kg