


## MLC-122/SW - Microphone Cable 100m 2x0.24mm

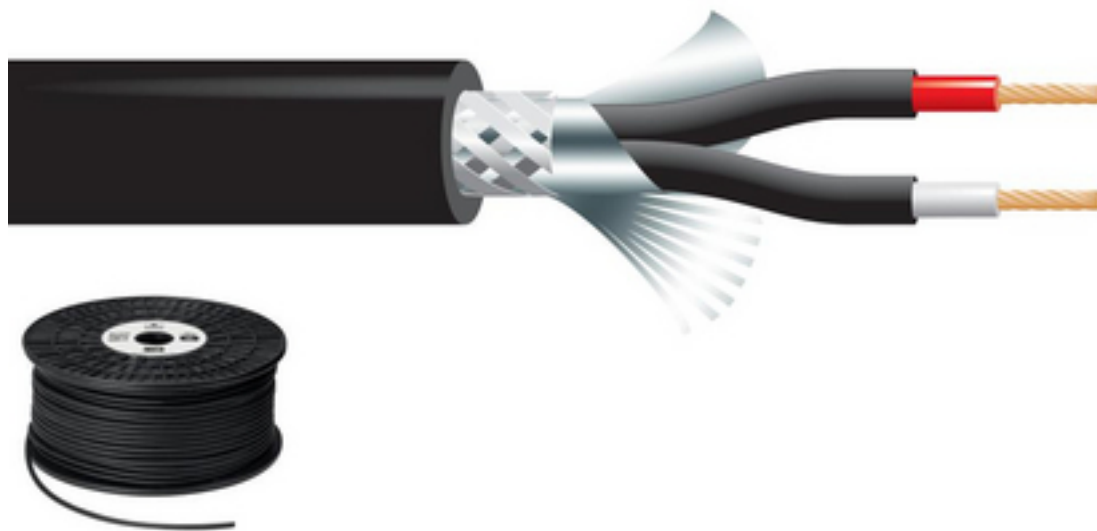

### Mikrofonkabel, "HØJ KVALITET"

- 100 m rulle
- 2 x 0,24 mm<sup>2</sup>
- Metermarkering
- Dobbelt-skærmet
- Udvendig diameter: Ø 7 mm
- Kapacitet: 125 pF/m
- Sort isolering
- Støjsvagt

## Technical data:

|                        |                            |
|------------------------|----------------------------|
| Intended use           | : microphone               |
| Connectors             | : -                        |
| Cable specification    | : -                        |
| Length                 | : 100 m                    |
| Spliced                | : -                        |
| Colour                 | : black                    |
| Internal conductor     | : 2 x 0.24 mm <sup>2</sup> |
| Material               | : OFC                      |
| No. of cores           | : 2                        |
| Cable diameter         | : Å~ 7 mm                  |
| Metre marking          | : yes                      |
| Minimum bending radius | : -                        |
| Shielding              | : common, double           |
| Shielding value        | : -                        |
| Impedance              | : -                        |
| Attenuation            | : -                        |
| Capacitance            | : 125 pF/m                 |
| Power rating           | : -                        |
| Rated current          | : -                        |
| Packaging              | : reel                     |
| Weight                 | : 6.6 kg                   |
| Position               | : -                        |
| Special feature        | : -                        |
| Other features         | : low-noise                |