
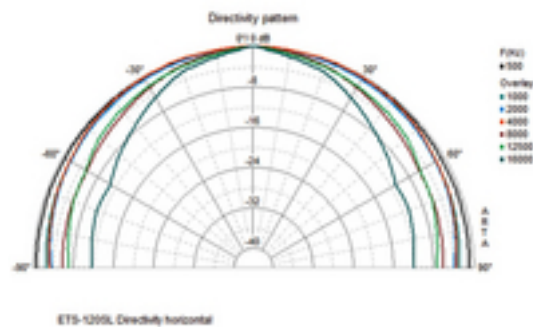


# ETS-120SL/WS - PA Speaker Column

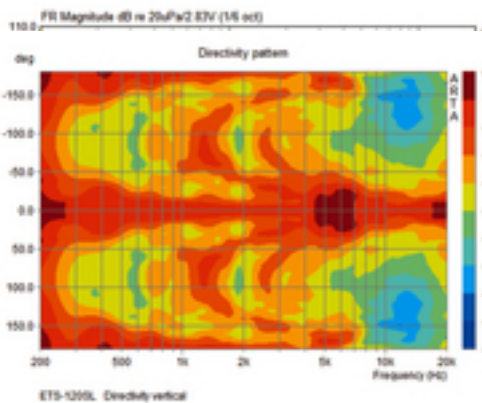

These super slimline speaker systems are the perfect solution whenever unobtrusive PA technology and a high-quality sound are required at the same time. These slimline array speakers were technically feasible only due to the development of new speaker systems which are a combination of flat cone speakers and magnetostatic drive. For a full range sound reproduction, the application of a subwoofer system is recommended.

Pair of line array design speakers, 4 Ohm, in slimline extruded aluminium cabinets.

- Elegant slimline design
- Cross-sectional area not much bigger than a 1 Euro coin

- New type of speaker systems with magnetostatic drive and flat cone speakers
- Very wide bandwidth reproduction with an excellent sound quality
- High transmission range due to line array system
- Connection via screw terminal
- Fine-meshed front grille with fleece lining
- Supplied with mounting brackets and connection cables

tools4music 4/2017

“Design speaker, column speaker, array speaker - the ETS-120SL/WS from MONACOR is almost invisible due to its narrow width and depth, despite its height of 1,200 mm. Thus, it is possible to implement unobtrusive PA applications in room corners and well-designed residential or commercial environments. The speaker provides an unobtrusive sound and combined with respective subwoofer support and integration into a controller-optimised setting, the fun is just beginning. You can't see anything, but it is quite impressive when the subwoofer starts to provide a powerful bass combined with the high-resolution speakers ETS-120SL/WS. Not exactly a bargain, but 'invisible speakers' for a stylish lifestyle ambience may actually be an invaluable asset. Therefore, thumbs up for an unobtrusive speaker which provides a great sound just for the ears.”

Pros and Cons

- + fine sound
- + unobtrusive appearance, super slimline design
- + neat workmanship
- + practice-oriented radiation range
- + ultra lightweight
- + supplied with extensive mounting auxiliaries

## Technical data:

Low-impedance	: 1
Active/passive	: passive
Transmission technology	: -
Total output power	: -
Power rating (RMS)	: -
Total power rating	: 80 W
Power rating (RMS)	: 40 W
Impedance	: 4 Ohm
Frequency range	: 120-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: line array speaker
Full range speaker	: 4 x (20 x 120 mm)
Bass speaker	: -
Midrange speaker	: -
Tweeter	: -
Number of speakers	: 4
Speaker size	: 20 x 120 mm
SPL	: 88 dB/W/m
Max. rated SPL	: 103 dB
Radiation angle/beam angle	: H: 160°/V: 40°
Radiation angle, horizontal	: 160°
Radiation angle, vertical	: 40°
Features	: -
Housing material	: aluminium
Colour	: white
Mounting device	: screw-on bracket
Protected against ball rebound	: -
Protection class	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: -
Dimensions	: 36 x 1,210 x 22 mm
Width	: 36 mm
Height	: 1,210 mm

Depth	: 22 mm
Weight	: 0.95 kg
Inputs	: screw terminal
Outputs	: -
Replacement voice coil	: -
Other features	: -
Accessories	: -
Packing dimensions (W x H x L)	: 0.17 x 0.075 x 1.35 m
Gross weight	: 2.78 kg
Net weight	: 2.02 kg