


## SA-100 - Amplifier

**2 x 50**  
W<sub>RMS</sub>

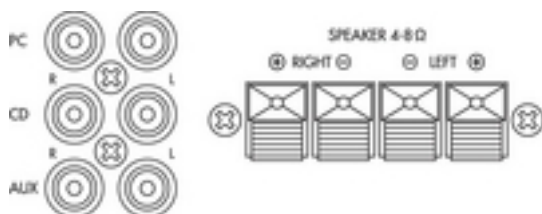

### Kompakt universal stereoforstærker, 50 W

- Lydløs i brug: læserfrit kølesystem
- 3,5 mm indgang med justerbar følsomhed på frontpanel
- USB port på frontpanel til strømforsyning og opladning af eksterne apparater
- Lydkildevælger
- Volumen-, bas- og diskantkontrol
- 6,3 mm hovedtelefonudgang
- Robust metalkabinet

## Technical data:

Fanless	: 1
Peak output power	: 2 x 50 W
Power rating	: 50 W
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: 2 x 25 W
Power rating at 8 Ohm	: 2 x 20 W
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm bridged operation	: -
Power rating with 8 Ohm bridged operation	: -
Output impedance	: -
Channels	: 2
Zones	: -
Inputs	: 140 mV/46 kOhm (PC, CD, aux) 140 mV/12 kOhm, 25 mV/32 kOhm (player)
Attenuation factor	: -
Frequency range	: 20-20,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: $\pm 12$ dB
Equalizer midrange	: -
Equalizer treble	: $\pm 12$ dB
S/N ratio	: ? 70 dB
Crosstalk attenuation	: -
THD	: -
Phantom power	: -
Mains voltage	: $\approx$ 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 150 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: -
Power supply (possible alternative)	: -
Admiss. ambient temp.	: 0-40 °C

Width

: 212 mm





Height	: 56 mm
Depth	: 250 mm
Rack units, RU	: -
Weight	: 2.6 kg
Connections	: 1 x RCA L/R (PC), 1 x RCA L/R (CD), 1 x RCA L/R (aux), 1 x 3.5 mm jack (player), 4 x spring-load. speaker term. (speakers)
Packing dimensions (W x H x L)	: 0.315 x 0.105 x 0.315 m
Gross weight	: 3.11 kg
Net weight	: 2.6 kg