
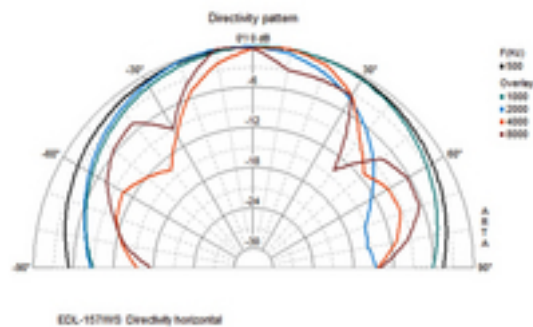


# ESP-157/WS - PA Wall Speaker

**100V**

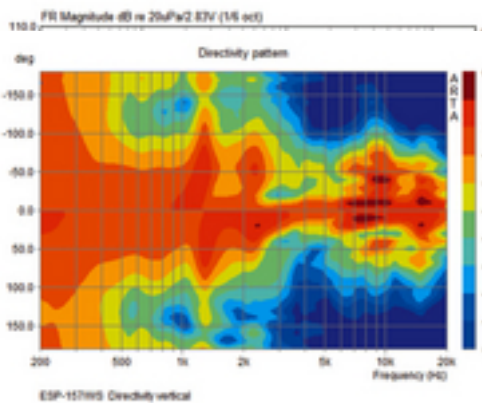

## PA wall speaker

- 100 V line technique via audio transformer with 2 power taps
- Good sound characteristics due to 2-way system
- Plastic cabinet of a special design with protective metal grille
- Closed rear panel, screwed
- Horizontal and vertical mounting possible

## Technical data:

|                                |                      |
|--------------------------------|----------------------|
| 100 V                          | : 1                  |
| Active/passive                 | : passive            |
| Transmission technology        | : 100 V              |
| Total output power             | : -                  |
| Power rating (RMS)             | : -                  |
| Total power rating             | : -                  |
| Power rating (RMS)             | : 15/7.5 W           |
| Impedance                      | : -                  |
| Frequency range                | : 100-20,000 Hz      |
| THD                            | : -                  |
| S/N ratio                      | : -                  |
| Input signal                   | : -                  |
| System                         | : -                  |
| Full range speaker             | : -                  |
| Bass speaker                   | : -                  |
| Midrange speaker               | : -                  |
| Tweeter                        | : -                  |
| Number of speakers             | : -                  |
| Speaker size                   | : -                  |
| SPL                            | : 91 dB/W/m          |
| Max. rated SPL                 | : -                  |
| Radiation angle/beam angle     | : -                  |
| Radiation angle, horizontal    | : -                  |
| Radiation angle, vertical      | : -                  |
| Features                       | : -                  |
| Housing material               | : -                  |
| Colour                         | : -                  |
| Mounting device                | : -                  |
| Protected against ball rebound | : -                  |
| Protection class               | : -                  |
| Admiss. ambient temp.          | : 0-40 °C            |
| Power supply                   | : -                  |
| Dimensions                     | : 240 x 340 x 105 mm |
| Width                          | : 240 mm             |
| Height                         | : 340 mm             |

|                                |                          |
|--------------------------------|--------------------------|
| Depth                          | : 105 mm                 |
| Weight                         | : 1.7 kg                 |
| Inputs                         | : -                      |
| Outputs                        | : -                      |
| Replacement voice coil         | : -                      |
| Other features                 | : 2-way system           |
| Accessories                    | : -                      |
| Packing dimensions (W x H x L) | : 0.245 x 0.11 x 0.345 m |
| Gross weight                   | : 0.816 kg               |
| Net weight                     | : 1.674 kg               |