


MPT-165 - Piezo Tweeter

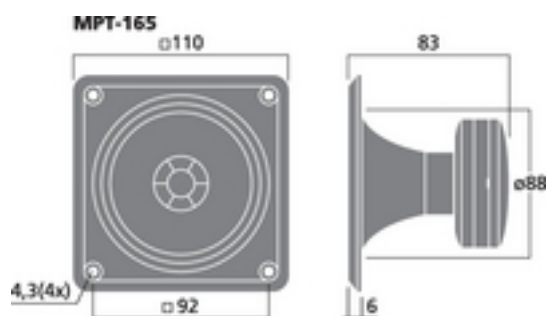

Piezo tweeter

- Bullet type
- Deep low limit frequency

Technical data:

Impedance (Z)	: ? 1,000 Ohm
Transmission technology	: -
Frequency range	: 1,800-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: -
Peak music power output (MAX)	: 115 W (8 Ohm system) 225 W (4 Ohm system)
SPL	: 93 dB/W/m
Max. rated SPL	: -
Max. voltage	: ~ 30 V
Radiation angle	: V: 45°/H: 45°
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: Å~ 88 mm
Mounting depth	: 80 mm
Mounting hole diameter	: -
Hole spacing X-axis	: 92 mm
Hole spacing Y-axis	: 92 mm
Dimensions	: 110 x 110 x 83 mm
Outside diameter	: -

Width	: 110 mm
Height	: 110 mm
Depth	: 83 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.083 kg
Packing unit	: 1
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.11 x 0.08 x 0.11 m
Gross weight	: 0.085 kg
Net weight	: 0.083 kg
Low-impedance	: 1