
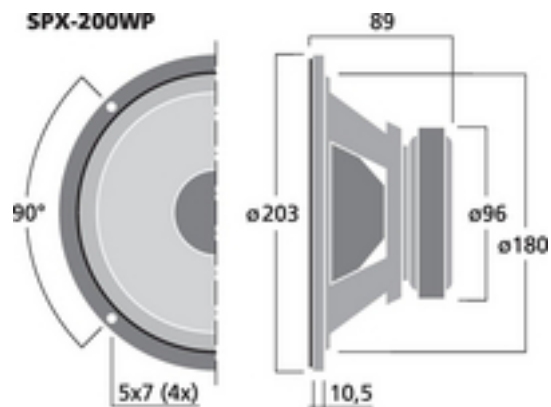


SPX-200WP - Univ.-Fullrange-Speaker

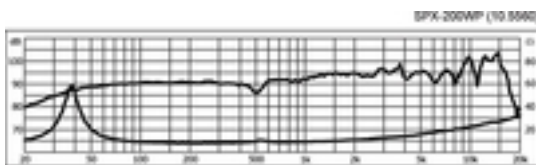

Hi-fi full range speaker, 50 W, 8 Ohm

- Excellent sound quality
- Very wide frequency range, slightly rising towards the high frequencies
- Low-resonance and weatherproof polypropylene cone with rubber surround
- Very good bass reproduction
- Ideally suited for application in closed cabinets

Klang+Ton 02/2013

“Classical results in a modern design - an exciting full range speaker. WP actually stands for waterproof.



Thus, a speaker suitable for outdoor applications. In the measuring section, the SPX-200WP astonishingly provides a performance exactly like some of my favourite full range speakers.”

Technical data:

| | |
|---|------------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission technology | : - |
| Frequency range | : f3-18,000 Hz |
| Resonant frequency (fs) | : 36 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 50 W |
| Peak music power output (MAX) | : 100 W |
| SPL | : 89 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.95 mm/N |
| Moving mass (Mms) | : 19.7 g |
| Mech. Q factor (Qms) | : 4.18 |
| Electr. Q factor (Qes) | : 0.69 |
| Total Q factor (Qts) | : 0.59 |
| Equivalent volume (Vas) | : 60.5 l |
| DC resistance (Re) | : 7.6 Ohm |
| Force factor (BxL) | : 6.79 Tm |
| Voice coil induct. (Le) | : 0.35 mH |
| Voice coil diameter | : \tilde{A} 25 mm |
| Voice coil former | : Kapton |
| Linear excursion (X _{MAX}) | : \pm 2 mm |
| Eff. cone area (Sd) | : 213 cm ² |
| Magnet weight | : 564 g |
| Magnet diameter | : \tilde{A} 96 mm |
| Mounting cutout | : \tilde{A} 180 mm |
| Mounting depth | : 78.5 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : \tilde{A} 203 mm x 89 mm |
| Outside diameter | : \tilde{A} 203 mm |

| | |
|--------------------------------|---------------------------|
| Width | : Å~ 203 mm |
| Height | : - |
| Depth | : 99 mm |
| Colour | : black |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 1.32 kg |
| Packing unit | : 1 |
| Type of speaker | : 8" |
| Packing dimensions (W x H x L) | : 0.215 x 0.115 x 0.215 m |
| Gross weight | : 1.45 kg |
| Net weight | : 1.32 kg |
| Outdoors | : 1 |
| Low-impedance | : 1 |