


EDL-706/12 - PA Loudspeaker

100V

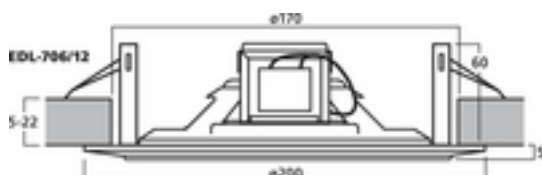

PA ceiling speaker

- 100 V transmission technology via audio transformer with power taps
- For a ceiling thickness from 5 to 22 mm
- Full range speaker, type 165
- Good speech intelligibility
- Robust metal version (basket and protective grille)

Supplied in packing units (PU) of 12 pcs. only

Technical data:

Impedance (Z)	: -
Transmission technology	: 100 V
Frequency range	: 120-17,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 6/3/1.5 W
Peak music power output (MAX)	: -
SPL	: 93 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: Å~ 170 mm
Mounting depth	: 60 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: Å~ 200 mm x 65 mm
Outside diameter	: Å~ 200 mm

Width	: Å~ 200 mm
Height	: -
Depth	: 65 mm
Colour	: white
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.6 kg
Packing unit	: 12
Type of speaker	: 165
Packing dimensions (W x H x L)	: 0.23 x 0.48 x 0.43 m
Gross weight	: 9.25 kg
Net weight	: 7.2 kg
100 V	: 1